

本产品宣传手册为永林电子部分产品，更多详细资料敬请垂询本公司工程技术人员。
因产品技术不断创新，届时恕不另行通知。版权所有©2024永林电子，保留所有权利。



www.YLEchina.com
www.YLErelays.com

THE GLOBAL SUPERIORITY OPERATOR
OF ELECTRICAL COMPONENTS

全球电装部件优势运营商



宁波市鄞州永林电子电器有限公司
NINGBO YINZHOU YONGLIN ELECTRON ELECTRICAL EQUIPMENT CO.,LTD.
地址：中国宁波市鄞州区横溪工业区
Add: Hengxi Industrial Park Yinzhou District Ningbo China
Tel: (86)574-88065188 88068167
Fax: (86)574-88068180 88063217
E-mail: manager@YLErelays.com
客户服务热线：400-826-0001

华南广州销售公司
Guangzhou Branch:
Tel: (0086)0757-89391595
Fax: (0086)0757-89391596
孙先生：13902285241

深圳销售公司
ShenZhen Branch:
Tel: (0086)0755-83295598
Fax: (0086)0755-61605092
俞先生：13632897705

顺德销售公司
Shunde Branch:
杨先生：13685810009



王林沪 董事长
Frank Wang President
Mobile phone
0086-13867879677

宁波市鄞州永林电子电器有限公司
NINGBO YINZHOU YONGLIN ELECTRON ELECTRICAL EQUIPMENT CO.,LTD.
地址：中国宁波横溪工业区 邮编 P.C:315131
ADD: Hengxi industry park Ningbo China
电话 tel: (0086)574-88065188 88068178-818
传真Fax: (0086)574-88068180
E-mail: manager@YLErelays.com
Http: //www.YLErelays.com
服务热线 Service hotline: 400-826-0001



微信扫一扫

RELAYS
继电器



永林电子官网

Company Introduction

公司简介

宁波市鄞州永林电子电器有限公司是一家专业从事继电器研发、制造、销售为一体的国家级高新技术企业。产品广泛应用于智能家居、家电、交通、工业、能源、通讯、医疗等领域。创始于1997年的永林一直以成为“全球电装部件优势运营商”为目标，坚持以高标准、高起点、高效率为核心的制造体系，通过设计优化及持续改进。先进的制造技术和制造设备，为海内外客户提供高性价比的产品。

永林一贯遵循“开拓、创新、团结、拼搏”的企业精神，坚持“以质取胜”的经营方针。经过二十余年的奋力拼搏，公司建立了一套完整的质量保证体系，先后通过了ISO9001、ISO14001、IATF16949体系认证，产品获美国UL、CUL，德国VDE、TUV和中国CQC等安全认证。所有产品符合欧盟ROHS2.0指令要求，完备可靠的质量、完美的技术服务，使永林成为全球广大客户理想的选择。

今朝，永林将一如既往的追求完美、至诚服务，以永远超前的意识 致力于产品的研发、制造、销售和服务。以一流的技术、一流的管理、一流的装备、一流的环境和一流的人才确保生产一流的产品，以永不满足的追求，达到产品的完美。至真至诚、全心全意为客户提供满意的需求和服务。

Ningbo Yonglin Electron Electrical Equipment Co., Ltd.(YLE) is a professional high-tech enterprises focus on development, production, sales of the relays. Products are widely used in intelligent furniture, household appliances, transportation, industry, energy, communications, medical and other fields. Established in 1997, YLE set the "global superiority operator electrical components" as the goal, Adhere to high standards, high starting point, high efficiency as the core of manufacturing system, through the design optimization and continuous improvement. advanced Manufacturing technology and manufacturing equipment, to provide customers with high cost-effective products.

YLE Company has always followed the spirit of enterprise by "pioneering, innovation, unity, hard work," adhere to the "winning by quality" business policy. After more than ten years of hard working, YLE had established a completely quality system, YLE has passed the ISO9001, ISO14001 and IATF16949 certification, and the products obtained UL、CUL、VDE、TUV、China CQC certification. all products meet the EU ROHS requirements. YLE become the customer's from all over the world first choice by Reliable quality assurance and perfect technical service.

Now, YLE will always pursuit of perfection and sincere service. Devote into research &develop , production, sales and service by the superior consciousness, with the first-class technology, management, equipment, environment and talent, YLE will ensure the first-class products. YLE will pursuit the perfect product by continuously effort, never self satisfy, and Sincerely and honestly provide satisfy products and services for the customers.



企业荣誉 / AWARDS




国家级高新技术企业
National high-tech enterprises



浙江省绿色环保企业
Green enterprises in Zhejiang Province



省级高新技术企业研究开发中心
Provincial high tech enterprise research and Development Center

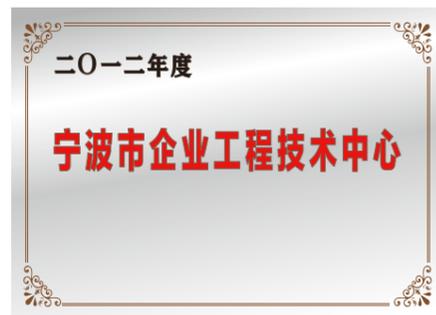

宁波市市级工程技术中心
Ningbo municipal engineering and technology center

体系认证 / CERTIFICATION



实验中心 / CERTIFICATION

本中心拥有各类实验仪器、设备共50余套。主要包括：盐雾试验台、高低温冲击、循环、恒温、恒湿试验箱、三综合振动试验台、耐久性试验台、失效分析试验台、二次元测量仪、光谱分析仪、投影仪等实验设备。确保继电器各项分析、验证等实验需求。

The Lab now had all 50 kinds of instruments and equipment. including: salt spray test stand,high and low temperature impact , circulation,constant temperature and humidity chamber,three integrated vibration test bed ,relay durability test bed ,relayfailure analysis test bed, Quadratic element measuring instrument, spectroanalysis instrument, Projector and other experimental equipment. Ensure the relay analysis, verification and other experimental requirements.



物流系统 / TRANSPORTATION SYSTEM

采用先进的物流储存质量保证体系，采用条码与ERP信息系统批次管控相结合的方式，严格控制物料的先进先出、统一物流尺寸链通过AGV进行收发流转。先进的物料防错，从源头到验收、入库、配料、直至发料上线贯穿整个过程。

Adopts advanced materials storage system, store by barcode and ERP system for batch control ,control strictly of Advanced materials frist out, Unified logistics size chain through the AGV transceiver circulation . Advanced material error prevention ,it throughout the whole process of inspection,storage ,till distributing material to the production line .




生产系统 / PRODUCTION SYSTEM


零件加工采用先进的管理加工方式，保证产品的稳定性，全面满足电装部件的供应需求。

Use advanced management for parts processing to guarantee the stability of the products, fully meet the production of the electrical components.

先进的智能化无尘车间、自动化设备与先进的制造技术、完善的质量保证体系，完全能够满足客户的需求。

Advanced intelligent dust-free workshop, automation equipment and advanced manufacturing technology, YLE fully able to meet the quality and order requirements from customers.

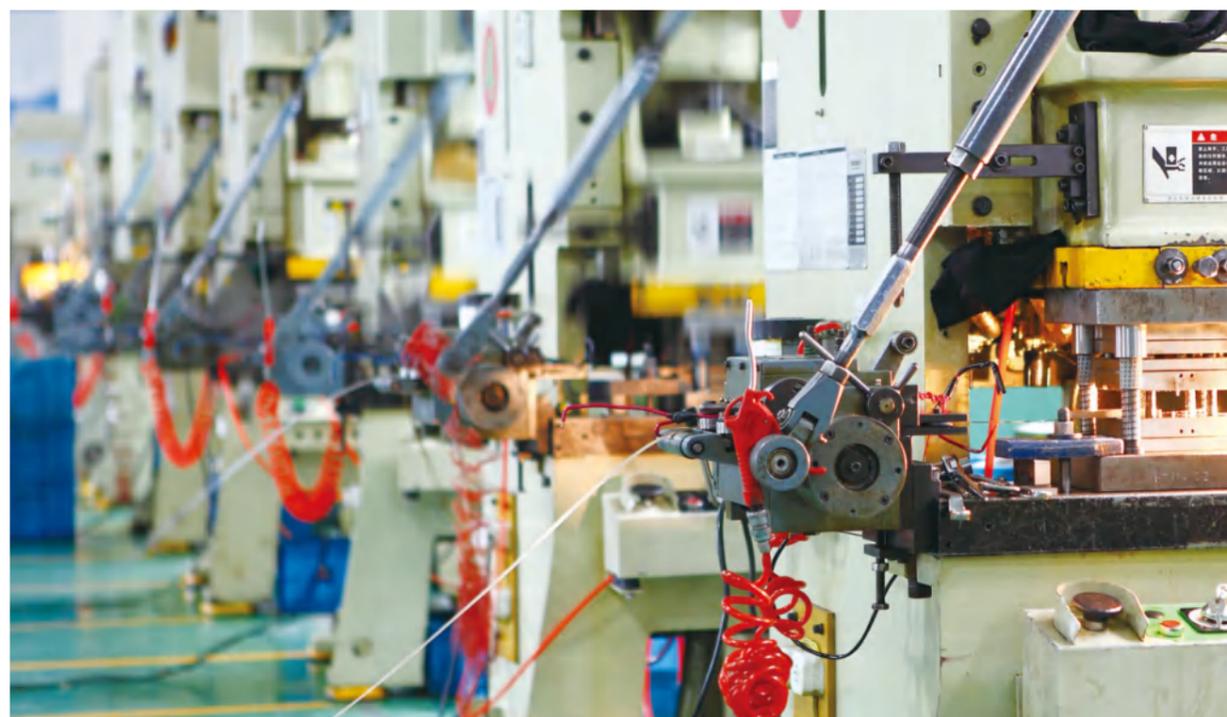

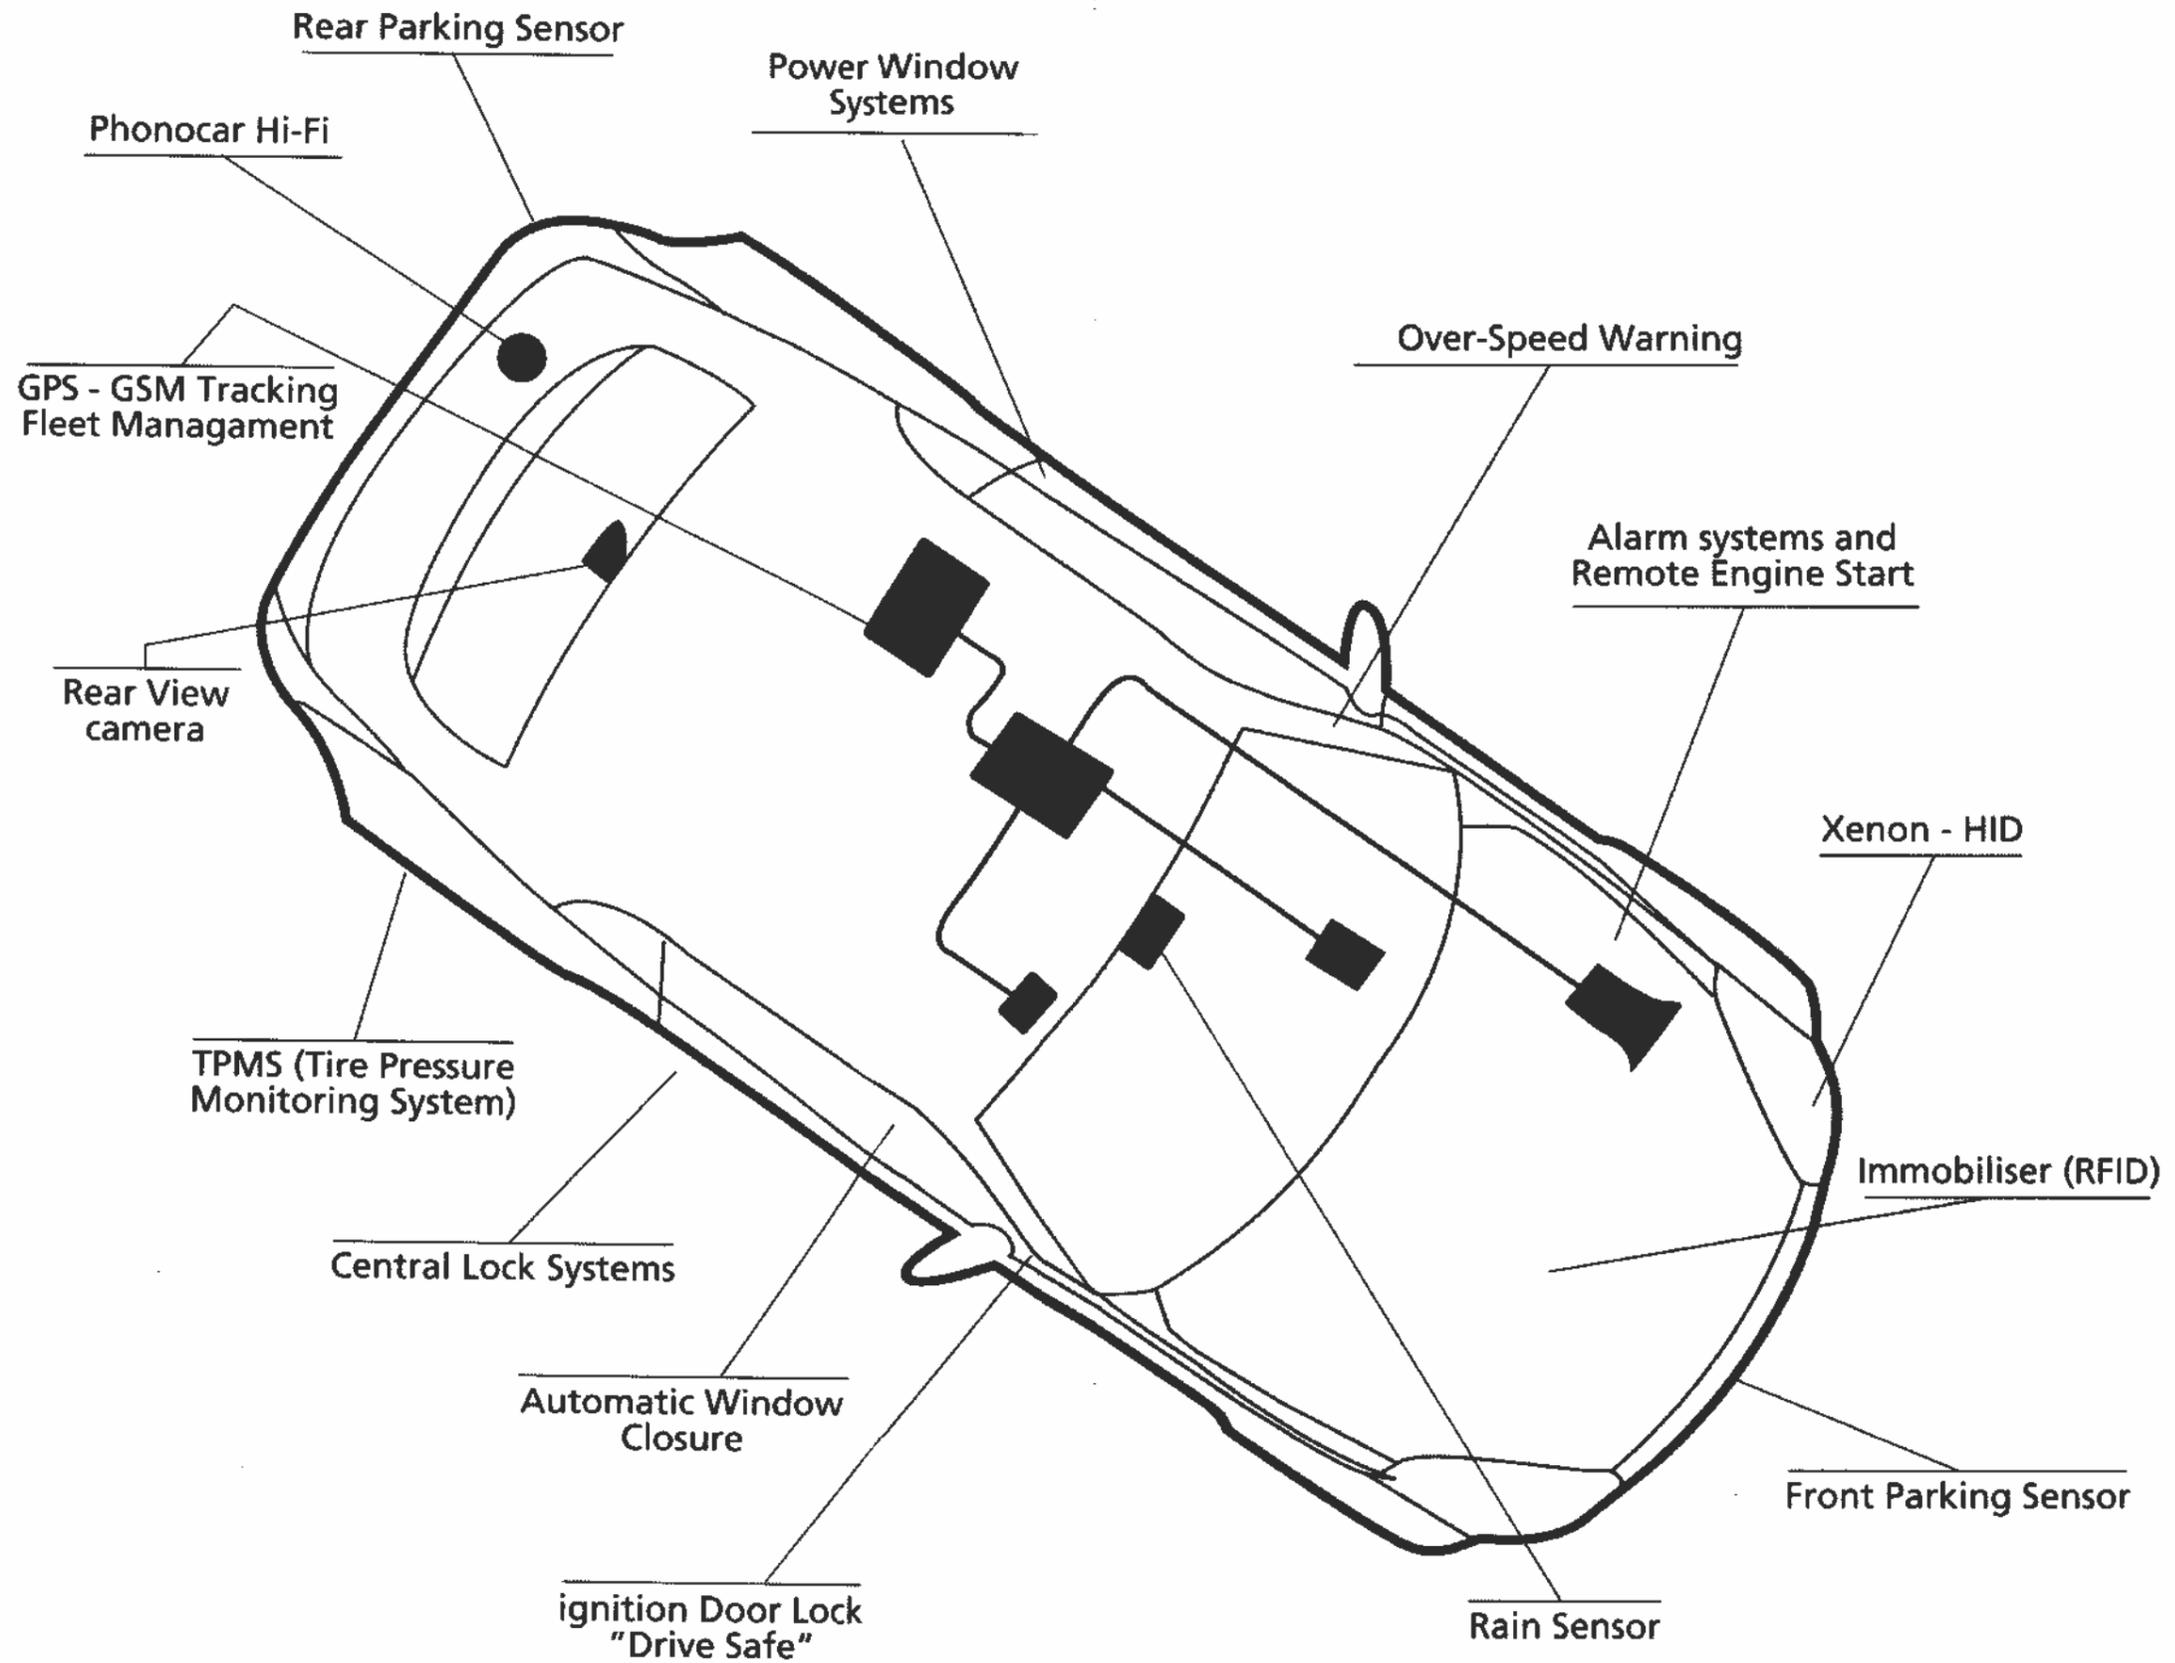

YL101 (4100)

特征 Features

负载Rating: 5A/14V
电压Voltage: 3V~24V
脚位Pin: 6脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)
OMRON G2E
HONGFA HM4100
ZETTLER AZ952
TYCO A201

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL304

特征 Features

负载Rating: 1A/120V
电压Voltage: 3V~24V
脚位Pin: 6脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)
Fujitsu FBR20

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL220-1

特征 Features

负载Rating: 15A/250V
电压Voltage: 6V~220V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
PCB式(Style)
颜色Color: 透明(Limpid)
OMRON YL1
MATSUSHITA HL
HONGFA JQX-13F

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL222

特征 Features

负载Rating: 10A/250V
电压Voltage: 6V~48V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL202 (4078)

特征 Features

负载Rating: 2x2A/125V
电压Voltage: 3V~48V
脚位Pin: 8脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)
OMRON G5V2
HONGFA JRC-19FD
TAKAMISAWA RY
MATSUSHITA DS2Y

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL305 (JZC-32F)

特征 Features

负载Rating: 10A/250V
电压Voltage: 3V~48V
脚位Pin: 4脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
ORIGINGAC OJE
ZETTER AZ767/765

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL220-2

特征 Features

负载Rating: 2X10A/250V
电压Voltage: 6V~220V
脚位Pin: 8脚(Pin)
接口Interface: 插入式(Plug-in)
PCB式(Style)
颜色Color: 透明(Limpid)
OMRON YL2
MATSUSHITA HL
HONGFA JQX-13F

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL223 (JQX141FF)

特征 Features

负载Rating: 10A/250V
电压Voltage: 3V~48V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
ZL20070303197.1
ORIGINAL OMI

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL211

特征 Features

负载Rating: 1A/120V
电压Voltage: 5V~24V
脚位Pin: 6脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)
OMRON G5V1
TYCO V23111

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL306

特征 Features

负载Rating: 5A/14V
电压Voltage: 3V~24V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 彩色(Colored)
OMRON G2E
HONGFA HM4100
ZETTLER AZ952
TYCO A201

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL220-3

特征 Features

负载Rating: 3X10A/250V
电压Voltage: 6V~220V
脚位Pin: 11脚(Pin)
接口Interface: 插入式(Plug-in)
PCB式(Style)
颜色Color: 透明(Limpid)
OMRON YL3
MATSUSHITA HL
HONGFA JQX-13F

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL224 (T90)

特征 Features

负载Rating: 40A/14V
电压Voltage: 3V~110V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO SIEMENS T91
OMRON G8P
MATSUSHITA JT

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL302 (JZC-22F)

特征 Features

负载Rating: 15A/125V
电压Voltage: 3V~48V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL307 (4137)

特征 Features

负载Rating: 2X5A/250V
电压Voltage: 3V~24V
脚位Pin: 8脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
ZETTER AZ946

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL220-4

特征 Features

负载Rating: 4X10A/250V
电压Voltage: 6,12,24V
脚位Pin: 14脚(Pin)
接口Interface: 插入式(Plug-in)
PCB式(Style)
颜色Color: 透明(Limpid)
OMRON LY4
MATSUSHITA HL
HONGFA JQX-13F

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL224T (T91)

特征 Features

负载Rating: 40A/14V
电压Voltage: 3V~110V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO SIEMENS T91
OMRON G8P
MATSUSHITA JT

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL303 (T73)

特征 Features

负载Rating: 7A/250V
电压Voltage: 3V~48V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO V23082
ZETTLER Az943
792 JQC-3FB

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL308 (4088)

特征 Features

负载Rating: 7A/220V
电压Voltage: 3V~48V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 透明(Limpid)
ZETTER AZ946

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL221 (JQX-141FD)

特征 Features

负载Rating: 2X5A/250V
电压Voltage: 3V~48V
脚位Pin: 8脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
ZL 20070303197.1
ORIGINA OMI

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC

YL224TE (T92)

特征 Features

负载Rating: 40A/14V
电压Voltage: 3V~110V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO SIEMENS T91
OMRON G8P
MATSUSHITA JT

R50045987
RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC


YL224TP
(T93)

特征 Features

负载Rating: 40A/14V
电压Voltage: 3V ~ 110V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
插入式(Plug-in)
颜色Color: 黑色(Black)
TYCO SIEMENS T91
OMRON G8P
MATSUSHITA JT

CQC 10002043818
UL E233840

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC




YL225

特征 Features

负载Rating: 30A/220V
15A/28V
电压Voltage: 6V ~ 110V
脚位Pin: 6脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
黑色(Black)

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC




YL226

特征 Features

负载Rating:
2X5A/250V
电压Voltage:
6V ~ 48V
脚位Pin:
6脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
彩色(Colored)

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC




YL228

特征 Features

负载Rating: 16A/250V
16A/28V
电压Voltage: 3V ~ 48V
脚位Pin: 8脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
黑色(Black)
HONGFA JQX-54FE
ZL20070303197.1
ORIGINAL OMI

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC




YL230
(JQX-54FE)

特征 Features

负载Rating:
25A/250V
电压Voltage:
6V ~ 48V
脚位Pin:
4脚(Pin)
接口Interface:
PCB式(Style)
插入式(Plug-in)
颜色Color:
黑色(Black)
HONGFA JQX-54FE


CQC 10002043818
UL E233840



YL275
(T75)

特征 Features


负载Rating: 16A/250V
2X8A/250V
12A/250V
电压Voltage: 3V ~ 48V
脚位Pin: 8脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
黑色(Black)
TYCO P&B T75
SONGCHUAN 88-1
RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC



YL312

特征 Features

负载Rating:
10A/120V, 20A/14V
2X10A/120V, 2X20A/14V
电压Voltage:
3V ~ 24V
脚位Pin: 7脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
黑色(Black)




ZL200820083115.1

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL317

特征 Features

负载Rating:
40A/14V
电压Voltage:
6,9V(1.9W)
12,18,24V(1.6W)
脚位Pin:
7脚(Pin)
接口Interface:
PCB式(Style)
颜色Color: 黑色(Black)
ZL200420109693.X
TYCO V23072 P&B VKM
HANGFA HFKP




RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL318

特征 Features

负载Rating:
20A/14V, 12A/120V
电压Voltage:
6,12,24V
脚位Pin: 5脚(Pin)
接口Interface:
PCB式(Style)
颜色Color:
黑色(Black)
FUJITSU FBR51
HONGFA HFKM
MATSUSHITA JJM




RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL326

特征 Features

负载Rating:
60A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
PCB式(Style)
颜色Color: 透明(Limpid)
散开式: Open type
ZL201020507968.0
ZL201030706629.0
ZL201030706630.3
ZL201030706667.6




RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL440-2

特征 Features

负载Rating:
2X5A/250V
电压Voltage:
14V ~ 110V
脚位Pin: 8脚(Pin)
接口Interface: PCB式(Style)
插入式(Plug-in)
颜色Color: 透明(Limpid)
OMRON MY
MATSUSHITA HC
HONGFA JZX-18FF




CQC 10002045417
UL E233840

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL440-3

特征 Features

负载Rating:
3X5A/250V
电压Voltage:
14V ~ 110V
脚位Pin: 11脚(Pin)
接口Interface:
PCB式(Style)
插入式(Plug-in)
颜色Color: 透明(Limpid)
OMRON MY
MATSUSHITA HC
HONGFA JZX-18FF




CQC 10002045417
UL E233840

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL440-4

特征 Features

负载Rating:
4X5A/250V
电压Voltage:
14V ~ 110V
脚位Pin: 14脚(Pin)
接口Interface: PCB式(Style)
插入式(Plug-in)
颜色Color: 透明(Limpid)
OMRON MY
MATSUSHITA HC
HONGFA JZX-18FF




CQC 10002045417
UL E233840

RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL240

特征 Features

负载Rating: 35A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC




OEM NO:
RY-68: Air Conditioning Compressor
Clutch Control ESSEX: 83-4580-23
Ford: E1FZ-19D572D
Four Seasons: 35987

YL241-01

特征 Features

负载Rating:
30A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
灰色(Grey)




RoHS compliant EC Directive
2005/717/EC, 2005/747/EC
and 2006/310/EC

YL241-02

特征 Features

负载Rating:
30A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
灰色(Grey)




OEM NO:

RY-69
Starter Switch Engine Control
ESSEX: 83-4580-24
Ford: E3E8-12A598-A1A
E3E8-12A598-A2A, E3E8-12A598-B1A, E3E8-12A598-B2A
E3E8-12A598-B3, E3E8-12A598-B3A, E3E8-12B563-AA
E3E8-12B598-AA, E3E8-12B598-BA, E3FZ-12A598A
RY-127
FORD: E6EF-12A646-BA
E6EF-12A646-B1A
E6EF-12A646-B2A, E6FZ-12A646B
F1CZ-12A646A, F1CZ-12A646B
E3VB-19A366AA, E6EB-19A366AA, E6EB-7G080-AA

YL242-01

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 灰色(Grey)



OEM NO:
RY-70
Automatic headlamp dimmer fuel Control instrument timer
ESSEX: 83-4580-22,
Ford: 85BG-6911-AA,


E1AB-9345-AA, E1FZ-8345C, E1VB-13A025-BA, E1VY-13A025A, E1VY-13A025D, E2EB-12B532AA, E35B-13A025-AA, E35B-13A025-BA, E3DZ-13A025A, E3OY-13A025-A, E3VY-13A025B, E4FZ-13A025A, E4LB-13A025-A3A, E4LZ-9345B,	86GG-13A025-AA, E1AB-9345AA, E1VB-12655AA, E1VB-9345-CA, E1VY-13A025B, E1VZ9345C, E2EB-8C616AB, E35B-13A025-B1A, E3DB-14A672-B1A, E3EB-12B532-AA, E3VB-13A025-B2A, E43Z-10D973A, E4LB-13A025-A1A, E4LY-13A025A, E5LB-9345-B1A,	EOVB-13A025-BB, E1EB-14A641AB, E1VB-13A025-AA, E1VC-9345C, E1VY-13A025C, E24FZ-12B532A, E2FZ-12B532A, E35B-13A025-B2A, E3D8-14A672-B2A, E3EB-7G080-BA, E3VB-13A025-CA, E4EB-13A025-AA, E4LB-13A025B-A2A, E4LZ-9345A, E5LB-9345-B2A
---	--	--

OEM NO:
E5LB-9345-B3A,
E5UB-13A025-A2A,
E5VB-13A025-A2A,
E6DZ-9345A,
E6VB-14A672-A3A,
E7RY-13A025A,
E7SB-13A025-A2A,
E8oY-13A025A,
E80B-13A025-A2A,
E93B-2C013-AA,
E95B-13A025-A2A,
F3OY-13A025-A
RY-142
Ford: E6AB-9345-A1A,
E6AB-9345-AA,
E5LZ-9345B,
E5UB-13A025-A3A,
E5VB-13A025-A3A,
E6DB-13C117AA,
E6VB-14A672-A1A,
E6VY-13A025A,
E7RY-13A025B,
E7SB-13A025-B,
E7SZ-13A025A,
E83Z-8Z658A,
E80Y-13A025A,
E93Z-8Z658A,
E95B-13A025-A3A,
E6AB-9345-A2A,
E6AZ-9345A,
E5UB-13A025-A1A,
E5VB-13A025-A1A,
E6DB-13C117AA,
E6VB-14A672-A2A,
E6VY-13A025B,
E7SB-13A025-A1A,
E7SZ-13A025A,
E80B-13A025-A1A,
E8VZ-9C392A,
E95B-13A025-A1A,
E9SZ-13A025A,
E6AB-9345-A3A

YL242-02

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 灰色(Grey)



OEM NO:
RY-71
Electric fuel pump control
ESSEX: 83-4580-21
FORD: F8PZ-14N123-BA


E1AB-12A646-BA, E1VY-12A646-AA, E2VY-12A646A, E35F-12A646-B1A, E3AB-9C392AA, E3AF-12A646-B1A, E3AF-12A646-A, E3EF-12A646-A1A, E3EF-12A646-B2A, E3UF-12A646-A2A, E3UF-12A646-BA, E43F-12A646-B2A, E4LB-9C392-CA, E7TZ-9C392B,	E1AB-12A646BA, E2VB-12A646-AA, E35F-12A646-A1A, E35F-12A646-B2A, E3AF-12A646-A1A, E3AF-12A646-B2A, E3AZ-12A646-A, E3EF-12A646-A2A, E3TF-12A646-BA, E3UF-12A646-B1A, E3UF-12A646-B2A, E43F-12A646-B1A, E43F-12A646-B, E4LY-9C392C, E9TZ-9C392C,	E1VB-12A646-AA, E35F-12A646-A2A, E35F-12A646-BA, E3AF-12A646-A2A, E3AF-12A646-BA, E3AF-12A646-C, E3EF-12A646-B1A, E3UF-12A646-A1A, E3UF-12A646-B2A, E43F-12A646-B1A, E43F-12A646-B, E4LY-9C392C, FBPZ-14N135CA
---	--	--

YL309

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200820083115.1

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC




YL309D

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200820083115.1


RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC



YL310

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)




YL311

特征 Features

负载Rating: NO: 30A/14V
NC: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC



OEM NO:
RY-242
BOSCH: 0332204177, 0332204187, 0332204188
Bosch: 0332204186
GM: 12065116, 12077876, 12088594,
12088596, 12167112, 22555387,
22570060, 25609047, 30013238


RY-479; AMC: 4687 567
CHRYSLER: 4707033
RY-480
CHRYSLER: 4671056
RY-481
CHRYSLER: 4687483
RY-482; Fuel Pump, Chrysler: 4557132
RY-483; Starter, Chrysler: 4557137
RY-616; Daytime Running Fog lamps
GM: 12088504

YL313

特征 Features

负载Rating: 2X30A/14V
2X40A/14V
电压Voltage: 6,12,24V
脚位Pin: 10脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC




YL314

特征 Features

负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

ZL200820083115.1
ZL200420109694.4
0332014151,003610-09
0332014201

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC



OEM NO:
RY-48
A, C, Fog lamp Keyless Entry, Manifold Heater
AMC: 5758912, 8933001776, 8936000400
BECK ARNLEY: 203-0011, 203-0061
BOSCH: 0332204158
Bosch: 0332204166
CHRYSLER: 33001777, 33001779, 4271149,
599719, 83001779,
Chrysler: 4271141, 4271499, 4373229,
4728987, 5234672, 5252672
Four Seasons: 35913
GM: 1623924, 90491314
Volvo: 1214764-1

OEM NO:
RY-30
Black-upLight & Neutral Safety Horn Or Read Defogger Power Tilt
Compressor Control Compressor Cut-off Marine
ALFA ROMEO: 116 00 65 13500, 116 00 65 13503, 116 00 65 13524
116 10 65 13514, 530 623 531 417
AMC: 3237368, 3239766, 582472, 582473,
8956002958, 8983500154
BECK ARNLEY: 203-0012
BMW: 61 31 154 228
BOSCH: 0332204101, 0332204128, 0332204134, 0332204151
Bosch: 0332014125, 0332019150 332204125, 0332204150
FERRARL: 110 355, 04 13 01 06
FORD: 1 574 754, 6 053 460, 6 165 402, 81DB-15K235-RA,
87DB-15K235-AA, D7NN-14N089-A, H75TM-11450-A
Fiat: 4263598, 4320629


OEM NO:
Ford: 87HU-15W400-DA, E5RY-15040A, E7HT-14088-AA,
E7HZ-14677A, E7HZ-14677B
Ford Seasons: 35795
GM: 1618951, 1620879, 1622657, 2098912
HONDA: 8-97125-441-0
MERCEDES BENZ: 000 821 01 63, 001 542 31 19
PEUGEOT: 1267 09, 0252 653 880
PORSCHE: 616 09 902 01, 944 094 615 01
SIERRA: 18-5703 18-5705
VOLKSWAGEN: 063 906 061, 165 937 503, 431 951 253D
VOLVO: 1259925, 1259926, 1501832,
1504952, 6212233, 6643474,
831725, 839367, 853544
Volvo pent: 876039-9
Yogo: 1617220

YL315

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200820083115.1
ZL200420109694.4
0332014125
0332014203

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC




YL315D

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200820083115.1
ZL200420109694.4
0332014125
0332014203

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC




YL316

特征 Features

负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC














YL319














特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200820083115.1

RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC



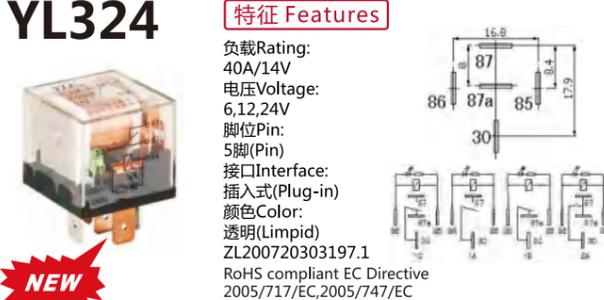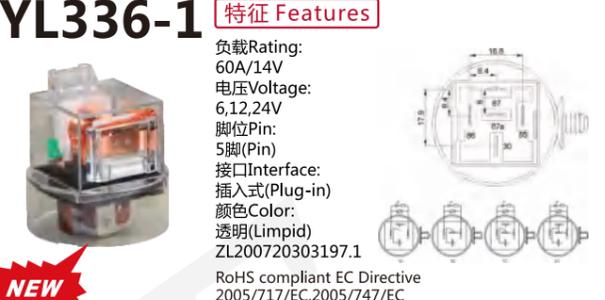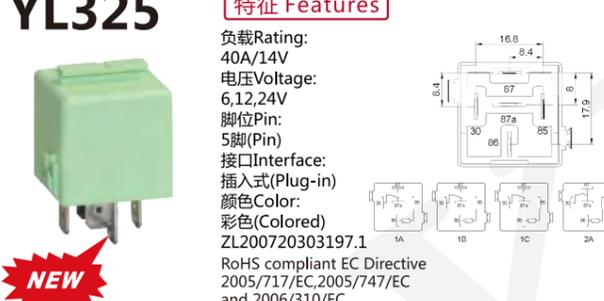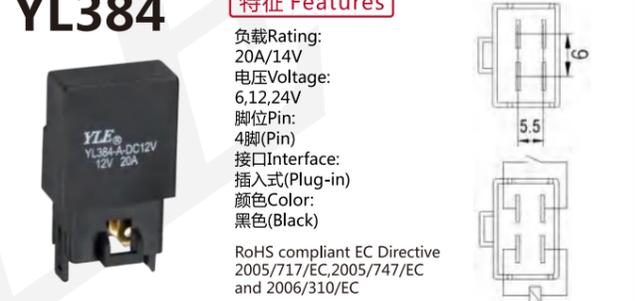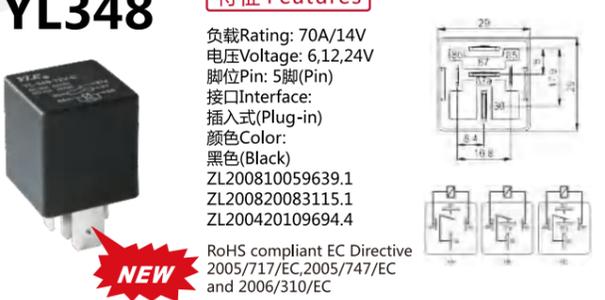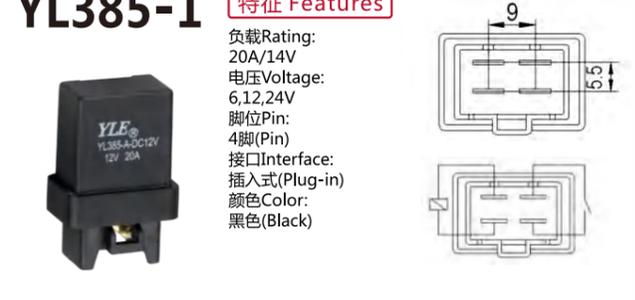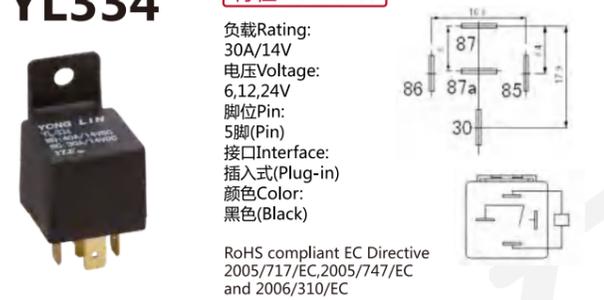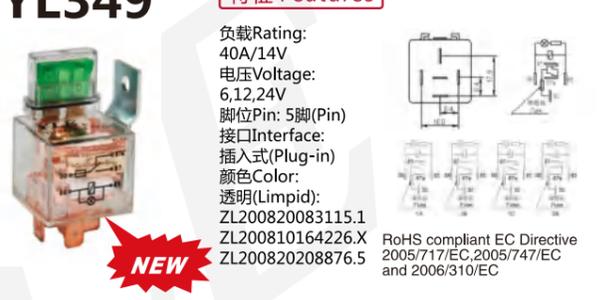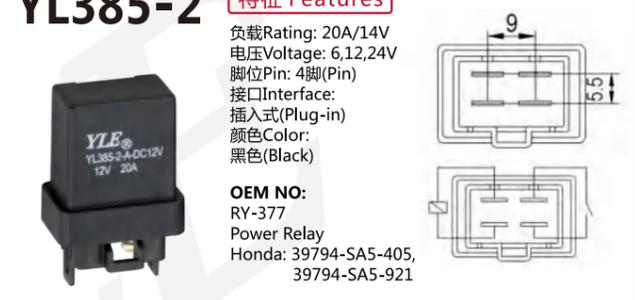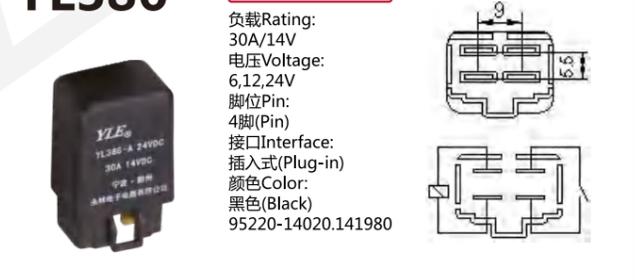
<p>YL324</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 透明(Limpid) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL336-1</p> <p>特征 Features</p> <p>负载Rating: 60A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 透明(Limpid) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL364</p> <p>特征 Features</p> <p>负载Rating: 60A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL382</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式Plug-in 颜色Color: 黑色(Black) 铁壳Iron shell: 201030300684.X 95220-14020.141980 OEM NO: RY-254; CHRYSLER: MB332453 Chrysler: MB399789 GM: 96059457 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>
<p>YL325</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 彩色(Colored) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL336-2</p> <p>特征 Features</p> <p>负载Rating: 60A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL367</p> <p>特征 Features</p> <p>负载Rating: 80A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL384</p> <p>特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 
<p>YL327</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,9V(1.9W) 12,18,24V(1.6W) 脚位Pin: 7脚(Pin) 接口Interface: PCB式(Style) 敞开式: Open type 欧式: (E type) ZL200420109693.X TYCO V23072 P&B VKM HANGFA HFKP RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL348</p> <p>特征 Features</p> <p>负载Rating: 70A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL200810059639.1 ZL200820083115.1 ZL200420109694.4 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL368 (Water proof)</p> <p>特征 Features</p> <p>负载Rating: 60A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: PCB式(Style) 颜色Color: 黑色(Black) ZL200820083115.1 4RD 003 520-091 4RD 003 520-097 90987-04001/04010 90987-156700-1570 90987-02025 90987-02010</p> 	<p>YL385-1</p> <p>特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black)</p> 
<p>YL334</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL349</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 透明(Limpid) ZL200820083115.1 ZL200810164226.X ZL200820208876.5 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL369</p> <p>特征 Features</p> <p>负载Rating: 80A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 透明(Limpid) ZL200810059639.1 ZL200810164226.X ZL200720303198.6 ZL200820208876.5 ZL200730294734.6 ZL200820083115.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL385-2</p> <p>特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) OEM NO: RY-377 Power Relay Honda: 39794-SA5-405, 39794-SA5-921</p> 
<p>YL335</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL359</p> <p>特征 Features</p> <p>负载Rating: 60A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL200810164226.X ZL200820208876.5 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL374</p> <p>特征 Features</p> <p>负载Rating: 80A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 透明(Limpid) ZL200720303197.1 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL386</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 95220-14020.141980</p> 
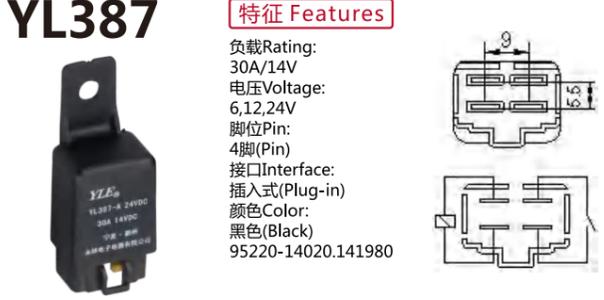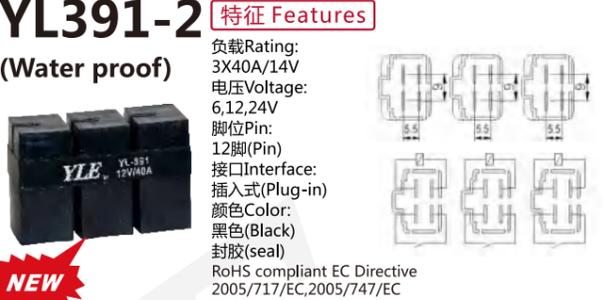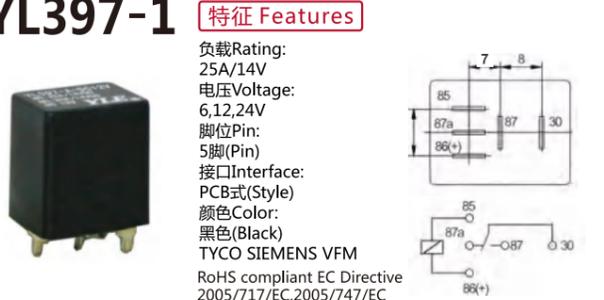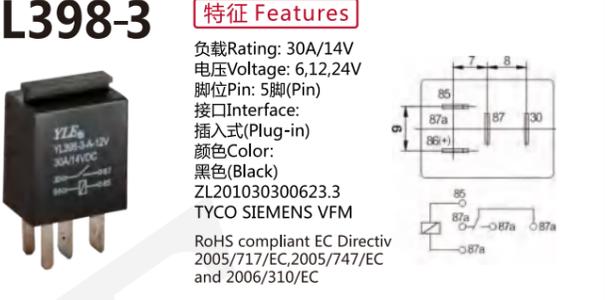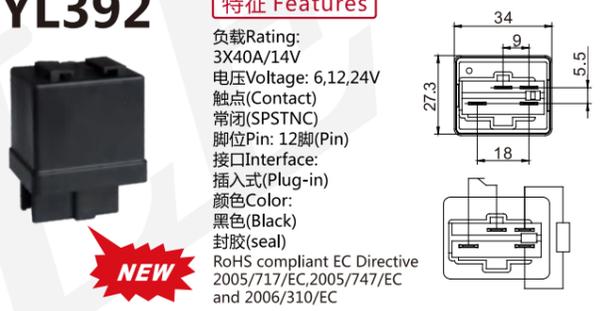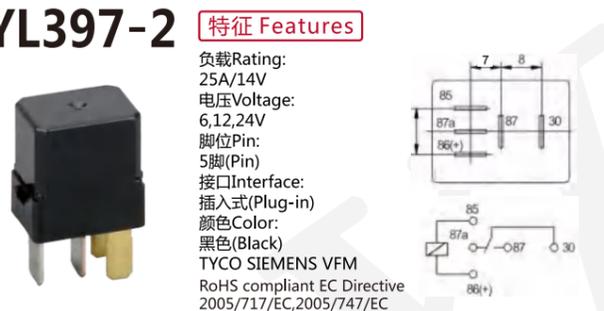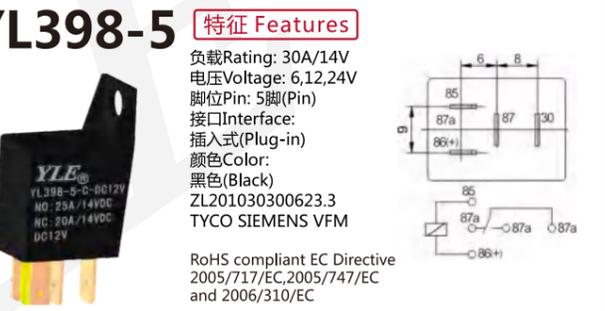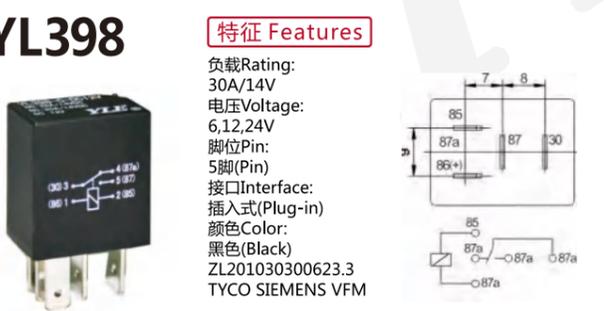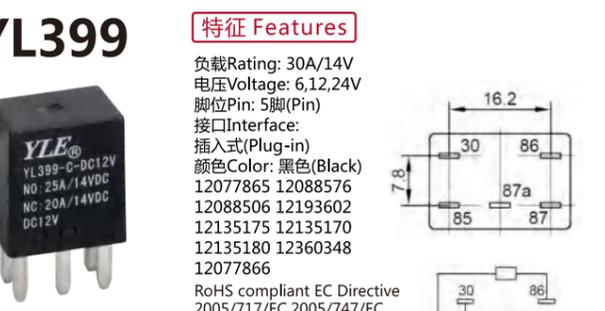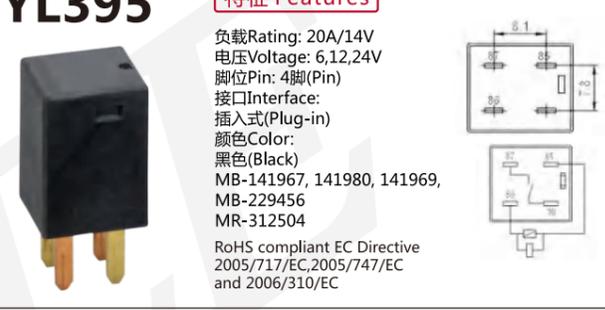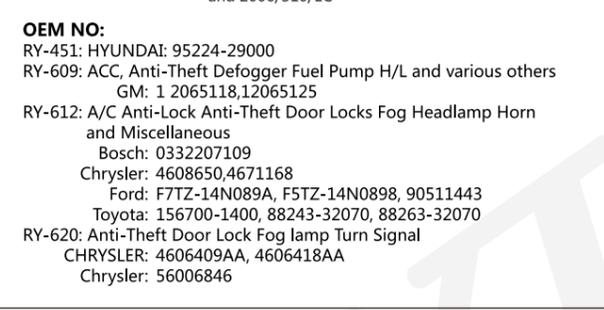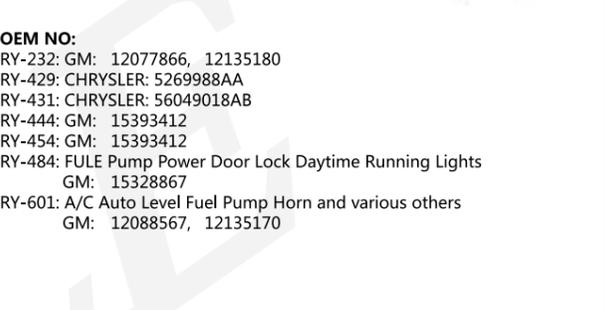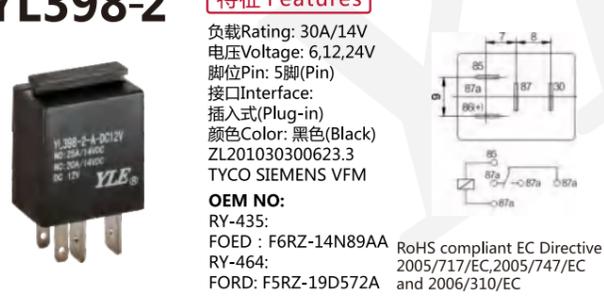
<p>YL387 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 95220-14020.141980</p> 	<p>YL391-2 特征 Features (Water proof)</p> <p>负载Rating: 3X40A/14V 电压Voltage: 6,12,24V 脚位Pin: 12脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 封装(seal) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL397-1 特征 Features</p> <p>负载Rating: 25A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: PCB式(Style) 颜色Color: 黑色(Black) TYCO SIEMENS VFM RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL398-3 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL201030300623.3 TYCO SIEMENS VFM RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 
<p>YL388 特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 铁壳Iron shell: 201030300684.X MB-141967, MB-229456 MB-312504, 141980 141969 RY-235: Honda: 39792-SM4-004 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL392 特征 Features</p> <p>负载Rating: 3X40A/14V 电压Voltage: 6,12,24V 触点(Contact): 常闭(SPSTNC) 脚位Pin: 12脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 封装(seal) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL397-2 特征 Features</p> <p>负载Rating: 25A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) TYCO SIEMENS VFM RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL398-5 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL201030300623.3 TYCO SIEMENS VFM RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 
<p>YL389 特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 3脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 铁壳Iron shell: MC: 848962.852954 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL394 特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) OEM NO: RY-160 ACADID: 95220-34600 Honda: 38320-SAS-003 Hyundai: 95220-33200 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL398 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL201030300623.3 TYCO SIEMENS VFM RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL399 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 12077865 12088576 12088506 12193602 12135175 12135170 12135180 12360348 12077866 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 
<p>YL390 特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL395 特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) MB-141967, 141980, 141969, MB-229456 MR-312504 RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	<p>YL398 特征 Features</p> <p>OEM NO: RY-451: HYUNDAI: 95224-29000 RY-609: ACC, Anti-Theft Defogger Fuel Pump H/L and various others GM: 1 2065118,12065125 RY-612: A/C Anti-Lock Anti-Theft Door Locks Fog Headlamp Horn and Miscellaneous Bosch: 0332207109 Chrysler: 4608650,4671168 Ford: F7TZ-14N089A, F5TZ-14N0898, 90511443 Toyota: 156700-1400, 88243-32070, 88263-32070 RY-620: Anti-Theft Door Lock Fog Lamp Turn Signal CHRYSLER: 4606409AA, 4606418AA Chrysler: 56006846</p> 	<p>YL399 特征 Features</p> <p>OEM NO: RY-232: GM: 12077866, 12135180 RY-429: CHRYSLER: 5269988AA RY-431: CHRYSLER: 56049018AB RY-444: GM: 15393412 RY-454: GM: 15393412 RY-484: FULE Pump Power Door Lock Daytime Running Lights GM: 15328867 RY-601: A/C Auto Level Fuel Pump Horn and various others GM: 12088567, 12135170</p> 
<p>YL391-1 特征 Features</p> <p>负载Rating: 3X40A/14V 电压Voltage: 6,12,24V 脚位Pin: 12脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p>  <p>NEW</p>	<p>YL396 特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) TYCO SIEMENS VFM OEM NO: RY-348: Defogger Fog lamps Horn Ignition Main Power Door Power Window DENSO: 156700-1980 Toyota: 90987-0200 RY-465: GM:88970290, TOYOTA: 90987-02022</p> 	<p>YL398-2 特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) ZL201030300623.3 TYCO SIEMENS VFM OEM NO: RY-435: FOED : F6RZ-14N89AA RY-464: FORD: F5RZ-19D572A RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> 	

YL400

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)



NEW

RoHS compliant EC Directive 2005/717/EC, 2005/747/EC and 2006/310/EC


OEM NO:

RY-280: GM: 12088756, 12088592, 12135034, 12135175, 12177236, 12193604, 12193614, 12360348
RY-419: GM: 15328864
RY-604: A/C Fuel Pump Radiator Fan
GM: 12077865, 12135198, 12177234, 12193602, 12193612, 15328865

YL401

特征 Features


负载Rating: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 10脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO DMR V23084



YL402

特征 Features


负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200730120271.1
HONGFA HFV8



YL403

特征 Features


负载Rating: 25A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
TYCO SIEMENS V23086



YL404

特征 Features

负载Rating: 25A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: PCB式(Style)
颜色Color: 黑色(Black)
OMRON G8N




RoHS compliant EC Directive 2005/717/EC, 2005/747/EC and 2006/310/EC

YL411

特征 Features

负载Rating: 22A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 白色(White)
铁壳Iron shell: 90987-02004, 056700-4810, 056700-5260, 3735040-00




OEM NO:

RY-51: A/C Ignition Main Rear Defogger Power Window and various Other Applications
BECK ARNLEY: 203-0009
CHRYSLER: 146490-2380, MB435486
Chrysler: MB261260, MB330024, MB435486
Daihatsu: 28300-87703-000
Ford: B630-18811, E8GY-9345A, E8GY-93458
Four Seasons: 35980 36120
GM: 94841751, 94841864, 94845814, 96052978
Honda: 38325-689-013, 39398-595-671, 39475-SB0-003, 39798-SE0-003
Mazda: FE68-18811
Mitsubishi: MB084670
ND: 056700-4810, 056700-5260
Nissan: 25230-89978
Subaru: 42955-7110, 82501-AA130, 82501-GA240,
Suzuki: 38860-60A00, 38860-60B10, 38860-78400
TOYOTA: 90987-02005
Toyota: 28300-16010, 28300-24031, 88630-22070, 88630-60020, 88630-95702, 90080-87001, 90987-02001, 90987-02002, 90987-02004, 90987-02008, 90987-05003, 90999-99089

YL412

特征 Features

负载Rating: 22A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 白色(White)
铁壳Iron shell: Z90987-03002 3735030-00




OEM NO:

RY-137:
BECK ARNLEY: 203-0064,
DENSO: 056700-5500
Four Seasons: 35843,
GM: 94840297
SUBARU: 25230-AA050,
Toyota: 88630-14030, 90987-03001

YL413

特征 Features


负载Rating: 22A/14V
电压Voltage: 6,12,24V
脚位Pin: 3脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 白色(White)
铁壳Iron shell: 90987-01003 056700-4800 056700-5250 3735020-00



YL468

特征 Features


负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored) 90987-02016 156700-1570



YL510

特征 Features

负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
ZL200730120272.6




OEM NO:

RY-109: AC and Accessories
Four Seasons: 35895
GM: 14089936

YL512

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
25230-89975, 25230-89977
MR5A02-8, 1-82550-146-0
25230-C9905, 25230-C9900
8-94235-677-0, MR5A-052-8
8-94218-497-0, 8-94118-912-0




OEM NO:

RY-205: Subaru: 82501AA050
RY-208: Subaru: 82501AA200
RY-228: GM: 94248989
Isuzu: 8-94248-989-0

YL513

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
25230-C9965
25230-C9980
25230-C9970
25230-CB000




OEM NO:

RY-63
Misc Applications
BECK ARNLEY: 203-0076, 203-0084
Ford: F3XY-14N089A
F3XY-14N089C
Four Seasons: 35813
Nissan: 25230-0B000, 25230-0B060
25230-0B080, 25230-61A05
25230-61A10, 25230-C9965
25230-C9970, 25230-C9980
25230-C9985, F3XY-9P704A
RY-236
Nissan: 25230-C9967

YL514

特征 Features


负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
25230-C9961



YL511

特征 Features

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
8-94112-911-0
8-94112-912-0
MR5L223-A2K
1-82550-176-0



OEM NO:


RY-230
GM: 94154803
Isuzu: 8-94112912, 8-94450-970-0

YL515

特征 Features



负载Rating: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 6脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
25230-C9962
25230-04G00
25230-04G05
25230-C9915




YL517

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
90987-87017, 90987-03003
90987-02009, 15606-0060




OEM NO:
RY-149: TOYOTA: 90084-98010
Toyota: 90987-04003
RY-363: A/C ACC ASCD Blower Defogger ECM Fuel Horn Sunroof Power Door & Window
Nissan: 25230-79971, 25230-9B900
RY-397: TOYOTA: 85932-30010
RY-469: NISSAN: 25230-1B005
RY-470: NISSAN: 25230-1B000
RY-473: NISSAN: 25230-1B080

YL516-1

特征 Features



负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
90987-04002
39762-SGO-003
056700-9340, 28300-46010
3735060-00, 056700-741




OEM NO:
RY-173: Honda: 39792-MS4-003
MAZDA: H380-61-690A
RY-291: Acura: 39792-SP0-014
Chrysler: MB609014, MD160919
DENSO: 056700-5061, 056700-8160
GM: 94841863, 94847867, 94858552
Honda: 39762-SG0-003
Mitsubishi: MB957905, MR301971
TOYOTA: 85880-24010
Toyota: 856700-6780, 85913-30029, 85925-17010,
90987-02007, 90987-04002
RY-433: DENSO: 056700-7581
TOYOTA: 88263-14110
RY-627: Daytime Running Headlamp
GM: 94847865
Toyota: 90987-02006

YL518

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
28300-16100
85926-30020
90987-87017
90987-03003




OEM NO:
RY-213: Honda: 39794-SG0-A01
RY-277: Ford: F32Z-12A646A
MAZDA: NF02-18-821A
RY-288: Ford: E1DB-15A244-AA, E1DB-8C609-A1A, E1DB-8C609-A2A
E1DZ-15A217A, E1DZ-8B658A, E35Y-15A217A,
F1CZ-12A646C
RY-450: TOYOTA: 28380-70030

YL516-2

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
90987-02006
3735060-00
39762-SGO-003
056700-9340




YL519-1

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)




OEM NO:
RY-418: ACC, Anti, Theft Defogger
Fog Lamps Fuel Pump Horn
NISSAN: 25230-79915

YL519-2

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)




YL519-3

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
25230-79915




YL520

特征 Features



负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
ZL200420109694.4
191.906.383




YL521

特征 Features



负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
ZL200420109694.4
191.906.383C



YL522

特征 Features



负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
94841862
90987-01001, 90999-99088




OEM NO:
RY-468:
VOLKSWAGEN: 1j0 906 381A
RY-494: Fuel Pump
Volkswagen: 191 906 383C

YL523

特征 Features



负载Rating: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
铁壳Iron shell:
56700-6210




YL524

特征 Features



负载Rating: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
056700-8282
85910-12010




YL525

特征 Features



负载Rating: 50A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)
28300-54110
156700-9301




YL526

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
056700-9721




YL527

特征 Features



负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
85910-22040
056700-6210



OEM NO:
RY-135: Toyota: 88630-17010
RY-390: Acura: 39762-SB0-003
39762-SB0-004
DENSO: 056700-6710

YL528 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
818630-17010
056700-7201
056700-6561

OEM NO:
RY-390: Acura: 39762-SB0-003
39762-SB0-004
DENSO: 056700-6710



YL532 **特征 Features**

负载Rating: 20A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
25230-89975

OEM NO:
RY-55: Fuel Pump Gas Ins Injection Relay
Acura: 8942184970
BECK ARNLEY: 203-0050
GM: 94154802, 94218497
ISUZU: 8-94129-152-0, 8-94163-557-0, 8-94233-137-0
Isuzu: 5-82550-029-0, 8-94154-802-0, 8-94128-497-0,
8-94230-222-0, 8-94233-134-0, 8-94248-826-0,
8-94429-947-0, 8-94481-820-0
Nissan: 25230-W1300
RY-28: Headlamp, Heater, Inhibitor & Miscellaneous Applications
BECK ARNLEY: 203-0005
FOUR Seasons: 35985
GM: 94233134, 94235627
ISUZU: 8-94235-627-0
Nissan: 25230-C8905, 25230-C9900,
25230-C9905, 25230-C9907
Subaru: 7825-01980, 82501-ASA050



YL536 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 铁壳Iron shell:
OEM NO:
HR-152: Horn Relay
AMC: 3186899, 3242253
3242520, 3816899



YL542 **特征 Features**

预热继电器
负载Rating: 80A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

OEM NO:
RY-54: Glow Plug
BECK ARNLEY: 203-0038, 203-0040
GM: 94248161, 94248162
Isuzu: 25230-W2511, 8-84248-162-0,
8-94153-849-0, 8-94236-922-0,
8-94238-295-0, 8-94248-161-0,
8-94248-162-0
NISSAN: 25230-W0500
NISSAN: 25230-09W01, 26230-W2501,
25230-W2510
RY-233: ISUZU: 1-82550-178-0



YL529 **特征 Features**


负载Rating: 15A/14V
电压Voltage: 6,12,24V
脚位Pin: 3脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

OEM NO:
HR-154: Horn Relay
BECK ARNLEY: 203-0036
NISSAN: 25630-04G00, 26320-17L01
Nissan: 25630-17L01, 26230-D0100



YL533 **特征 Features**

负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 3脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
8-97173-951-0
MR82C-741

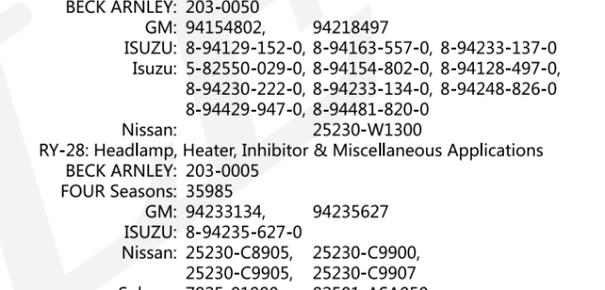


YL538 **特征 Features**

负载Rating: 2X30A/14V
电压Voltage: 6,12,24V
脚位Pin: 9脚(Pin)
接口Interface: 多种diversified
颜色Color: 黑色(Black)
透明(Limpid)
RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC



YL543 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
Coil power
2.4,2.9W
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)
223

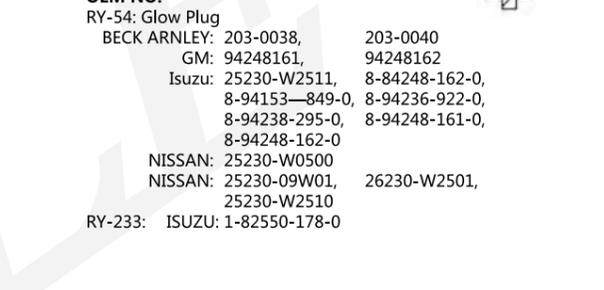


YL530 **特征 Features**

负载Rating: 15A/14V
电压Voltage: 6,12,24V
脚位Pin: 6脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)



YL534 **特征 Features**

负载Rating: 35A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)

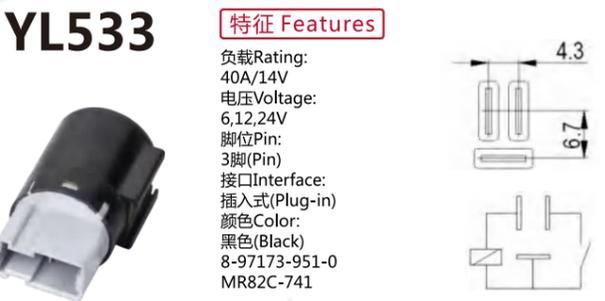

YL539 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 6脚(Pin)
接口Interface: 多种diversified
敞开式: Open type
RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC




YL544 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)




YL531 **特征 Features**

负载Rating: 15A/14V
电压Voltage: 6,12,24V
脚位Pin: 6脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 彩色(Colored)

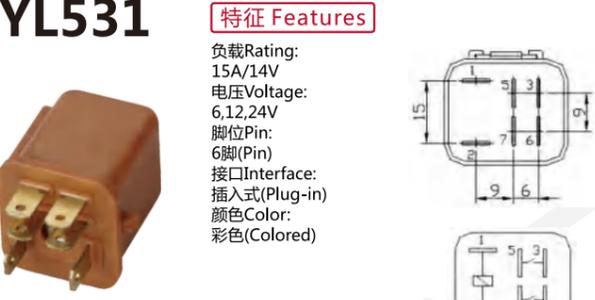

YL535 **特征 Features**

负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 3脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 铁壳Iron shell:
JL 2B - 3P
JL 2A - 3P

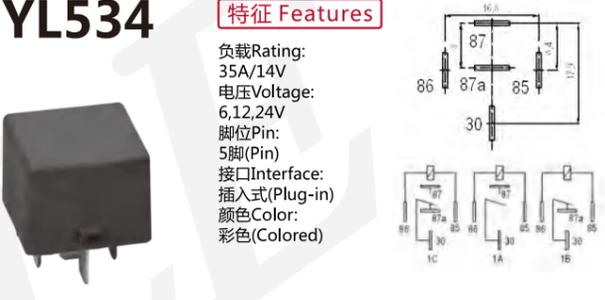

YL540 **特征 Features**

负载Rating: 30A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)



YL545 **特征 Features**

负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)



OEM NO:
RY-56: MISC Applications
BECH ARNLEY: 203-0007
FOUR Seasons: 35983
GM: 94118913, 94232223,
94379922, 94423168
ISUZU: 8-94118-223-0, 8-94232223-0
Isuzu: 8-94232-223-0, 8-94379-922-0,
8-94429-946-0
Nissan: 25230-C9920, 25230-C9925
25230-C9927
Subaru: 25229-AA001, 25232-AA000



YL541 **特征 Features**


起动继电器
负载Rating: 80A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)



YL545 **特征 Features**

负载Rating: 60A/14V
电压Voltage: 6,12,24V
脚位Pin: 4脚(Pin)
接口Interface: 插入式(Plug-in)
颜色Color: 黑色(Black)

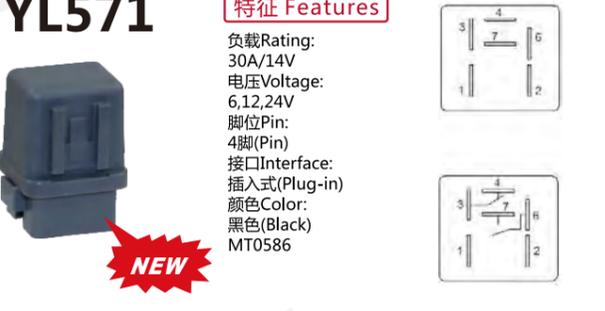


<p>YL546</p> <p>特征 Features</p> <p>负载Rating: 80A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 多种diversified 颜色Color: 黑色(Black)</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL561</p> <p>特征 Features</p> <p>负载Rating: 80A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 彩色(Colored) 颜色Color: 黑色(Black)</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL574</p> <p>特征 Features</p> <p>负载Rating: 20A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) SH188</p> <p>NEW</p> 	<p>YL602</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6V ~ 48V 脚位Pin: 6脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0478</p> <p>NEW</p> 
<p>YL548</p> <p>特征 Features</p> <p>负载Rating: 2X30A/14V 电压Voltage: 6,12,24V 脚位Pin: 9脚(Pin) 接口Interface: 多种diversified 颜色Color: 黑色(Black)</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL570</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black)</p> <p>NEW</p> 	<p>YL575</p> <p>特征 Features</p> <p>负载Rating: 50A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black)</p> <p>NEW</p> 	<p>YL603</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0480</p> <p>NEW</p> 
<p>YL558</p> <p>特征 Features</p> <p>负载Rating: 2X50A/14V 电压Voltage: 6,12,24V 脚位Pin: 6脚(Pin) 接口Interface: 多种diversified 插入式(Plug-in) 颜色Color: 黑色(Black)</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL571</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) MT0586</p> <p>NEW</p> 	<p>YL576</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) MT0520</p> <p>NEW</p> 	<p>YL604</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0481</p> <p>NEW</p> 
<p>YL559</p> <p>特征 Features</p> <p>负载Rating: 2X50A/14V 电压Voltage: 6,12,24V 脚位Pin: 6脚(Pin) 接口Interface: 多种diversified 插入式(Plug-in) 颜色Color: 透明(Limpid)</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL572</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) MT032</p> <p>NEW</p> 	<p>YL577</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black)</p> <p>NEW</p> 	<p>YL605</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 3脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0492</p> <p>NEW</p> 
<p>YL560</p> <p>特征 Features</p> <p>负载Rating: 2X50A/14V 电压Voltage: 6,12,24V 脚位Pin: 6脚(Pin) 接口Interface: 多种diversified 插入式(Plug-in) 颜色Color: 透明(Limpid) 指示 LED</p> <p>RoHS compliant EC Directive 2005/717/EC,2005/747/EC and 2006/310/EC</p> <p>NEW</p> 	<p>YL573</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) MT0366</p> <p>NEW</p> 	<p>YL601</p> <p>特征 Features</p> <p>负载Rating: 30A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0476</p> <p>NEW</p> 	<p>YL606</p> <p>特征 Features</p> <p>负载Rating: 40A/14V 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 接口Interface: 插入式(Plug-in) 颜色Color: 铁壳Iron shell: MT0508</p> <p>NEW</p> 

YL607

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0509




NEW

YL612

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0516




NEW

YL617

特征 Features



负载Rating:
20A/14V
电压Voltage:
6,12,24V
脚位Pin: 4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0647




NEW

YL1390

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
黑色(Black)



RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC


NEW

YL608

特征 Features



负载Rating:
30A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0511



NEW

YL613

特征 Features



负载Rating: 40A/14V
电压Voltage:
6,12,24V
脚位Pin:
4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0517




NEW

YL6120

特征 Features




负载Rating:
100A/14V
电压Voltage:
6V~48V
脚位Pin:
4脚(Pin)
接口Interface:
多种diversified
颜色Color:
黑色(Black)
ZL20073019544.0



Controller-4

YLK-4控制器




YL609

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0512




NEW

YL614

特征 Features



负载Rating:
20A/14V
电压Voltage:
6,12,24V
脚位Pin: 4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0518




NEW

YL1315

特征 Features



负载Rating: 40A/14V
电压Voltage: 6,12,24V
脚位Pin: 5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
黑色(Black)
ZL200820083115.1
ZL200420109694.4
0332014125
0332014203



NEW


RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC

YL610

特征 Features



负载Rating:
30A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0513



NEW

YL615

特征 Features



负载Rating:
20A/14V
电压Voltage:
6,12,24V
脚位Pin: 4脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0534




NEW

YL1324

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
透明(Limpid)
ZL200720303197.1



NEW


RoHS compliant EC Directive
2005/717/EC,2005/747/EC
and 2006/310/EC

YL611

特征 Features



负载Rating:
40A/14V
电压Voltage:
6,12,24V
脚位Pin:
5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0515




NEW

YL616

特征 Features



负载Rating:
20A/14V
电压Voltage:
6,12,24V
脚位Pin: 5脚(Pin)
接口Interface:
插入式(Plug-in)
颜色Color:
铁壳Iron shell:
MT0608



NEW


YL37804

Flasher



特征 Features

正常闪光频率:
75-100 c/m;
灯故障提示闪光频率:
120-330c/m
负载:
2(4)×21W±5w(负载检测)
12v/24v




YI37801



Flasher



特征 Features

正常闪光频率:
75-100 c/m;
灯故障提示闪光频率:
120-330c/m
负载:
2(4)×21W±5w(负载检测)
12v/24v


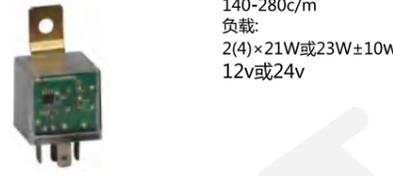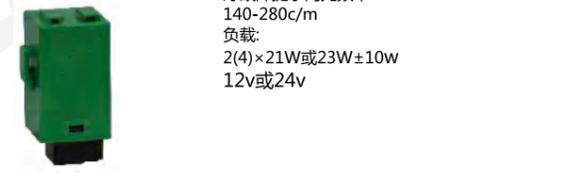
<p>YL37805 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p> 	<p>YL37810 Flasher</p> <p>特征 Features 闪光频率: 75-100 c/m: 负载: 2(4)×21W或23w±10w 12v或24v</p> 	<p>YL37819 Flasher</p> <p>特征 Features 正常闪光频率: 75-100 c/m: 灯故障提示闪光频率: 120-330c/m 负载: 2(4)×21W±5w(负载检测) 12v/24v</p> 	<p>YL37832 Flasher</p> <p>特征 Features 闪光频率: 75-100 c/m: 负载: 2(4)×21W或23w±10w 12v或24v</p> 
<p>YL37806 Flasher</p> <p>特征 Features 闪光频率: 75-100 c/m: 负载: 2(4)×21W或23w±10w 12v或24v</p> 	<p>YL37811 Flasher</p> <p>特征 Features 闪光频率: 75-100 c/m: 负载: 2(4)×21W或23w±10w 12v或24v</p> 	<p>YL37820 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p> 	<p>YL37841 Flasher</p> <p>特征 Features 闪光频率: 75-100 c/m: 负载: 2(4)×21W或23w±10w 12v或24v</p> 
<p>YL37807 Flasher</p> <p>特征 Features 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 闪光Flash: 85c/m 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) 2(4)×21W+8W 12v 24v</p> 	<p>YL37812 Flasher</p> <p>特征 Features 电压Voltage: 6,12,24V 脚位Pin: 5脚(Pin) 闪光Flash: 85c/m 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) NO: C5-114071 NO: 231. 3747 (2×21-4)×2+1×3W silver contact 12v 24v</p> 	<p>YL37821 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p> 	<p>YL37842 Flasher</p> <p>特征 Features 正常闪光频率: 75-100 c/m: 灯故障提示闪光频率: 120-330c/m 负载: 2(4)×21W±5w(负载检测) 12v/24v</p> 
<p>YL368KZQ 控制器</p> 	<p>YL37813 Flasher</p> <p>特征 Features 电压Voltage: 6,12,24V 脚位Pin: 4脚(Pin) 闪光Flash: 85c/m 接口Interface: 插入式(Plug-in) 颜色Color: 黑色(Black) NO: C5-2114072 NO: 231. 3747 (2×21-4)×2+1×3W silver contact 12v 24v</p> 	<p>YL37822 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p>  <p>37822-3735110-C2000</p>	<p>YL550 Start Relay 启动继电器</p> 
<p>YL37808 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p> 	<p>YL37817 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p> 	<p>YL37823 Flasher</p> <p>特征 Features 正常闪光频率: 80-95c/m: 灯故障提示闪光频率: 140-280c/m 负载: 2(4)×21W或23W±10w 12v或24v</p>  <p>37823-3735015-C0100</p>	<p>YL810 Delay Relay 延时继电器</p> 



YLY01 YLY02 YLY05 YLY06 YLY07 YLY08 YLY09



YLY33 YLY34 YLY35 YLY36 YLY37 YLY38 YLY41



YLY10 YLY11 YLY12 YLY15 YLY16 YLY17 YLY18

ZL200730111763.4



YLY42 YLY47 YLY48 YLY49 YLY50 YLY51



YLY19 YLY20 YLY21 YLY22 YLY23 YLY24 YLY25

ZL200730111762.X



YLY52 YLY55 YLY56 YLY57 YLY58 YLY59



YLY26 YLY27 YLY28 YLY29 YLY30 YLY31 YLY32



YLY60 YLY63 (Water proof) YLY65 YLY66 YLY68 YLY70

ZL201030300676.5 ZL201130134342.X ZL201130134358.0 ZL201130134357.6 ZL201130134344.9



YL314-1
Socket



YL314-2
Socket



YL314-3
Crockery Socket



9005 White
Crockery Socket



9006 White
Crockery Socket



9006 Blue And
Crockery Socket



9005Plastc Blue
Crockery Socket



A2 Big Fuse
Socket



YL314-4
Socket



YL314-5
Socket



YL314-6
Socket



H7 Crockery
Socket




H7 Plastic
Socket



White 0.5 With Double
Pin 525 Socket



Insurance
保险盒



YL314-7
Socket



YL314-8
Socket



YL314-9
Socket



YL368
Socket



YL398-1
Socket



KG08 Socket
插座



S25 Socket
Crockery Socket



Gray T20 Single Brass
White Socket



H4 Bakelite
Socket



YL398-2
Socket



H4 Crockery Socket
Socket



ForH6.9004
Temperature



388
Crockery Socket



KG04



KG05



KG06



KG08



Coffee T20 Clouble Bress Wires
Socket



T10 Lamp
Socket



9004.9007
Crockery Socket



KG01



KG02



KG03



CPL2



CPL4



CPL5



CPL6

Model#	Description
YL-406 	GENERAL MOTORS 2006-2007
YL16-00 	Panasonic CQ-RDP400-500-650 CQ-RD210
YL16-010 	PIONEER DEH - 2200 UB new 2010 models
YL-1104 	Hyundai/Kia - 2006 - 2007 Factor Harness TO Aftermarket radion (Power/4 Speaker)
YL-416 	Saturn 2000-2006(24Pin) Plugs into Car Harness (Power/4 Speaker)
YL-858 	Mazda 2001-UP Plugs into Car Harness (Power/4 Speaker)
YL16-00 	Panasonic CQ-RDP400-500-650 CQ-RD210
YL16-04 	Pioneer DEH-P3500-3530





ZL200730111761.5

MSKW-01

- Remote starter with 2 dual button remote control
4键遥控,带有遥控启动控制按钮
- Code learning.
学习码
- Door lock/unlock outputs.
车门锁定/解锁功能
- No alarm needed to activate this unit
不需要报警器来激活这个单元
- Includes extended range antenna, plus all the features of the rcs100
包含外置天线,带有rcs100所有的功能



YLPAK-6000

- parking collision sensor with digital display
带液晶显示的倒车雷达系统
- automatically detecting obstacles once reversing gear is activated or once the brake pedal is pressed
踩脚刹或倒车时,系统会自动显示障碍物的距离
- compatible with any car model
兼容任何车型
- super-wide detectable prevents side impact
超宽角度探测,防止死角撞击



PW202

- Highest quality roll up or roll down. 2 windows
2门高品质升降器
- Activated from negative armed output
负极防盗输出激活
- Great for sunroofs or rear windows
适用于汽车天窗或后车窗




YLPAK-7000

- parking collision sensor with digital display
带液晶显示的倒车雷达系统
- automatically detecting obstacles once reversing gear is activated or once the brake pedal is pressed
踩脚刹或倒车时,系统会自动显示障碍物的距离
- compatible with any car model
兼容任何车型
- super-wide detectable prevents side impact
超宽角度探测,防止死角撞击



ZL200730111761.5



PW204

- Activated from negative armed output
负极防盗输出激活
- Great for sunroofs or rear windows
适用于汽车天窗或后车窗
- Highest quality roll up or roll down.4 windows
4门高品质升降器



YLPAK-9000

- parking collision sensor with digital display
带液晶显示的倒车雷达系统
- automatically detecting obstacles once reversing gear is activated or once the brake pedal is pressed
踩脚刹或倒车时,系统会自动显示障碍物的距离
- compatible with any car model
兼容任何车型
- super-wide detectable prevents side impact
超宽角度探测,防止死角撞击


YLPK-5000 Reversing radar 倒车雷达

- parking collision sensor with digital display
带液晶显示的倒车雷达系统
- automatically detecting obstacles once reversing gear is activated or once the brake pedal is pressed
踩脚刹或倒车时，系统会自动显示障碍物的距离
- compatible with any car model
兼容任何车型
- super-wide detective prevents side impact
超宽角度探测，防止死角撞击



YLAL-500 One-way burglar alarm of automobile 汽车单向防盗器

- Intelligent security setting
智能防盗设置
- Warning setting
设定警戒
- Side door triggering alarm
边门触发报警
- Ignition triggering alarm
点火触发报警
- Trunk triggering alarm
行李箱触发报警
- Co-pilot door unlocking
副驾驶车门开锁
- Remote control opening trunk
遥控开启行李箱

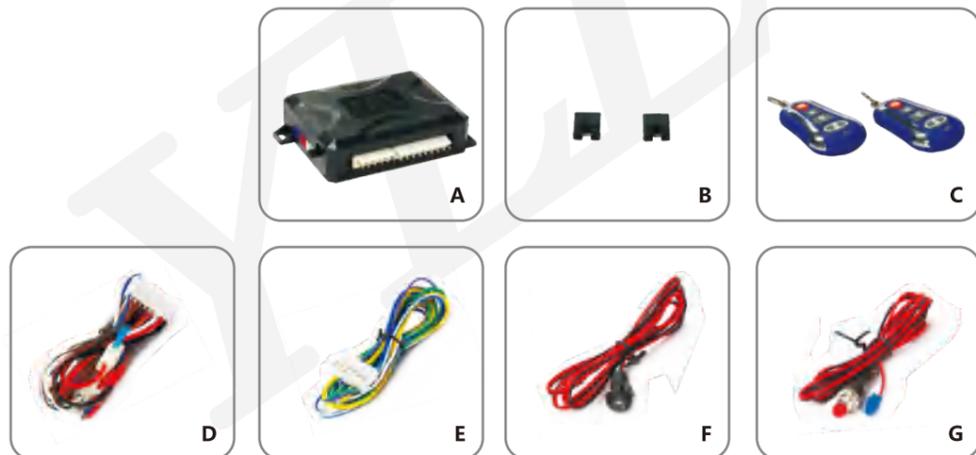


YLAL-700

- Two 4 button transmitters
两个4键遥控器
- Hi jack system(programable)
可编程的嗨杰克系统
- Active/passive arming (programable)
主动/被动 报警功能 (可编程)
- Trunk releases channel output
遥控行李箱
- Silent arming
静音报警
- Ignition door locks
点火门锁
- Led&valet switch
带发光二极管的开关
- Intrusion memory
触发记忆
- Parking lights flashing relay on board
停车转向灯闪烁
- Door locks output
车门关锁功能
- 130db 1 tone siren
一百三十分贝单音喇叭



YLAL-900 One-way burglar alarm of automobile 汽车单向防盗器

- Intelligent security setting
智能防盗设置
- Warning setting
设定警戒
- Warning triggering alarm
警戒触发报警
- Warning release
警戒解除
- Remote control opening trunk
遥控开启行李箱
- Trunk/rising window mode selection
行李箱/开窗模式选择
- Robbery prevention
防抢

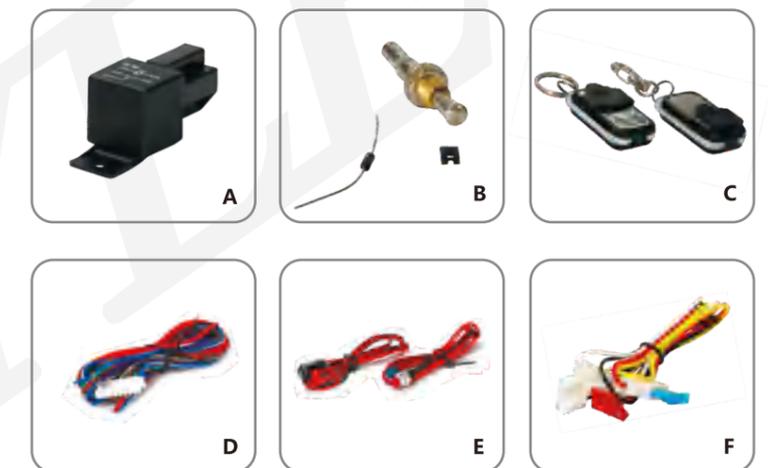

YLAL-1000

- Two 4 button transmitters
两个4键遥控器
- Hi jack system(programable)
可编程的嗨杰克系统
- Active/passive arming
(programable)
主动/被动报警功能(可编程)
- Trunk releases channel output
可遥控行李箱
- Silent arming
静音报警
- Ignition door locks
点火门锁
- Led&valet switch
带发光二极管的开关
- Intrusion memory
触发记忆
- Parking lights flashing relay
on board
停车转向灯闪烁
- Door locks output
车门关锁功能
- 130db 1 tone siren
一百三十分贝单音喇叭



YLAL-1200

- Remote Starter With 2 Dual Button Remote Control
遥控启动2双按钮，远程控制
- Code Learning
代码学习
- Door Lock/unlock Outputs
门锁/解锁输出
- No Alarm Needed To Activate This Unit
没有报警需要激活此股
- Includes Extended Range Antenna,plus All The Features
Of The Rcs100
包括外置天线，再加上所有的功能rcs100




KGZ07G Central Lock 中控锁

- Anti-block Design
Anti 块设计
- With Ultrasonic Welding .water Proof And Dust Proof
与超声波焊接。防水和防尘
- High Torque Motor
高力矩电机
- Strong Output
强大的输出
- With Long Service Life
使用寿命长
- Be Suitable For Various Autos
适用于各种汽车
- Compatible With Car Alarm System
汽车防盗系统



PTR100 Switch of suitcase 行李箱开关

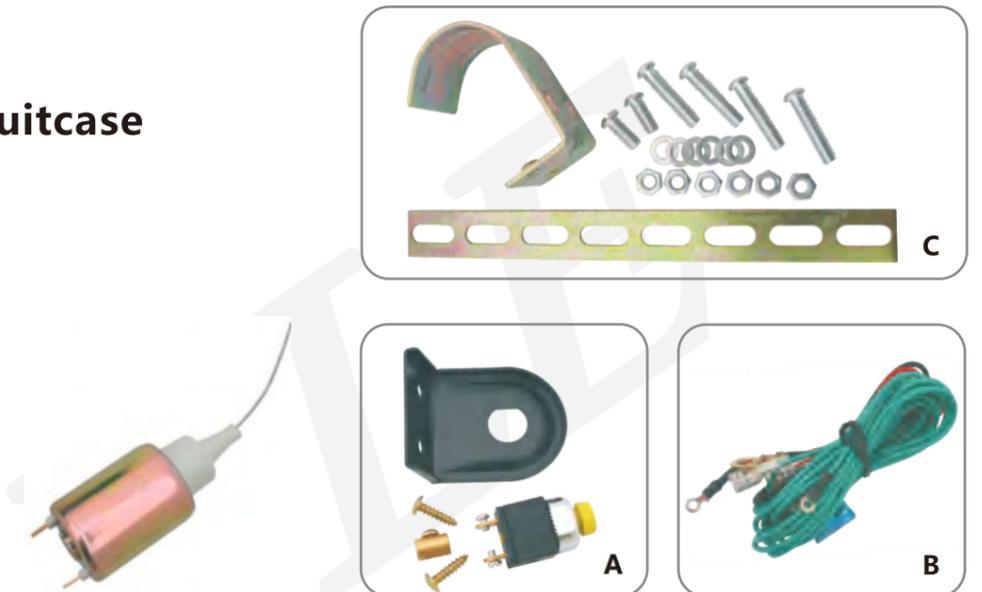



KGZ08-2P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统




KGZ08-5P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统



KCL2P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统

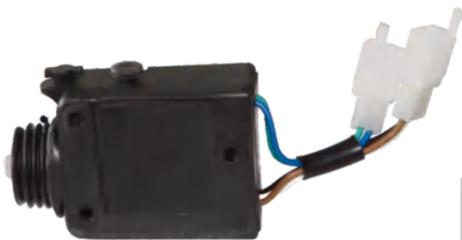


KCL5P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统




KGZ095P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统

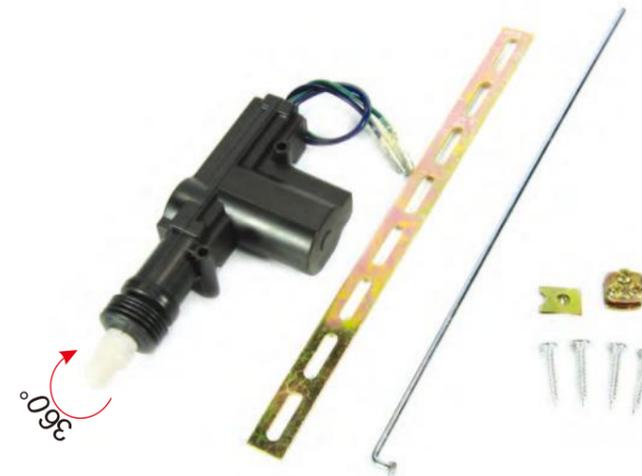


KGZ01G-2P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统
- 360°adjustable positioning hardware for easy installation (driver door conral and two front-door conral for option) 360°可调节的锁头, 安装容易。(驾驶室门锁控制或两个前门门锁控制可供选择)

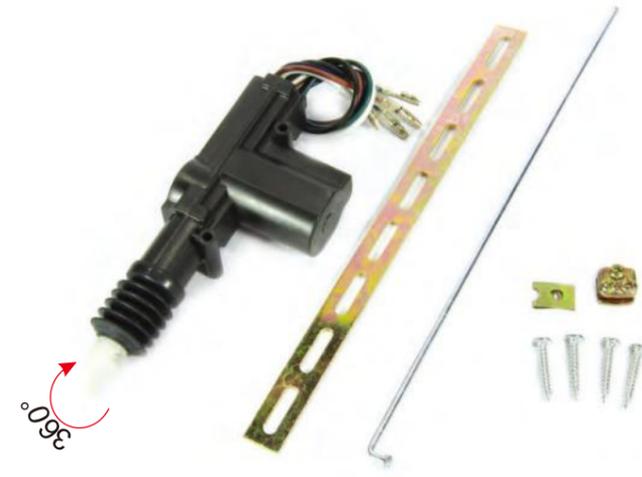

KGZ01G-5P


- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统
- 360°adjustable positioning hardware for easy installation (driver door conral and two front-door conral for option) 360°可调节的锁头, 安装容易。(驾驶室门锁控制或两个前门门锁控制可供选择)

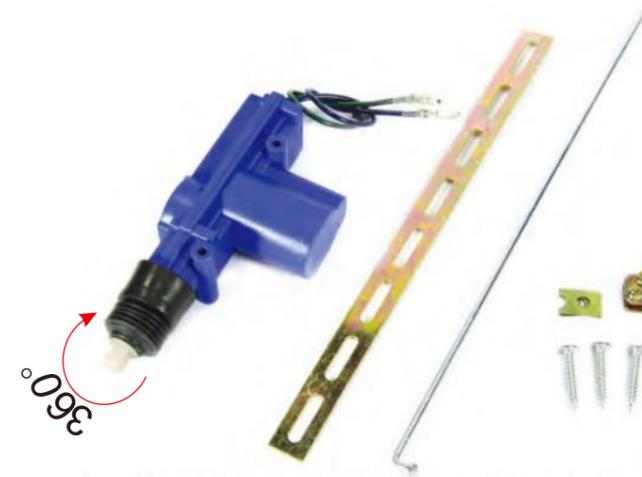

KGZ02G-2P

- Anti-block design 防卡死设计
- With ultrasonic welding .water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统
- 360°adjustable positioning hardware for easy installation(driver door conral and two front-door conral for option) 360°可调节的锁头, 安装容易。(驾驶室门锁控制或两个前门门锁控制可供选择)

KGZ02G-5P

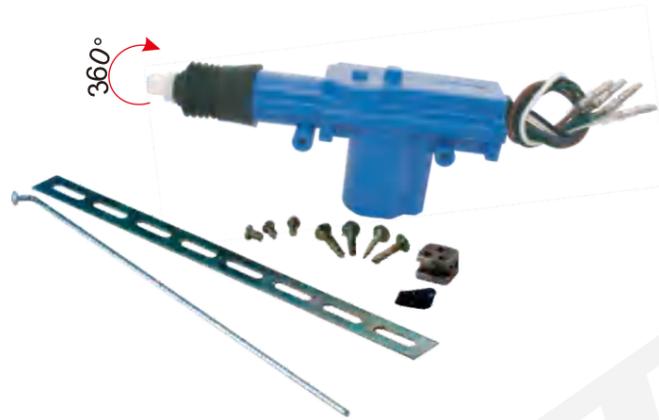

- Anti-block design
防卡死设计
- With ultrasonic welding .water proof and dust proof
超声波焊接工艺、防水和防尘
- High torque motor
大功率电机
- Strong output
强力输出
- With long service life
超长使用寿命
- Be suitable for various autos
适用于各种类型的汽车
- Compatible with car alarm system
兼容汽车防盗系统
- 360°adjustable positioning hardware for easy installation
(driver door contral and two front-door contral for option)
360°可调节的锁头, 安装容易。
(驾驶室门锁控制或两个前门门锁控制可供选择)

KGZ03G-2P



- Anti-block design
防卡死设计
- With ultrasonic welding .water proof and dust proof
超声波焊接工艺、防水和防尘
- High torque motor
大功率电机
- Strong output
强力输出
- With long service life
超长使用寿命
- Be suitable for various autos
适用于各种类型的汽车
- Compatible with car alarm system
兼容汽车防盗系统

KGZ03G-5P



- Anti-block design
防卡死设计
- With ultrasonic welding .water proof and dust proof
超声波焊接工艺、防水和防尘
- High torque motor
大功率电机
- Strong output
强力输出
- With long service life
超长使用寿命
- Be suitable for various autos
适用于各种类型的汽车
- Compatible with car alarm system
兼容汽车防盗系统


KGZ-1001-4D

One bunch of five lines, three bunches of two lines
Controlled by Controller A
一把五线,三把二线,用A控制器

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation (Driver door contral and two front-door contral for option)

Technical Date:

1. Working voltage:DC12V
2. Output current:4A
3. Working humidity:<75%
4. Working temperature range:-20℃-70℃
5. Working distance:22mm
6. Pull/push force:4KG
7. Working life:> 100,000times




KGZ-2001-4D

One bunch of five lines, three bunches of two lines
Controlled by Controller B
一把五线,三把二线,用B控制器

1. Anti-block design
2. With ultrasonic welding,water proof and dust proof
3. High torque motor
4. Strong output
5. With ling service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. easy installation
9. Square type
10. Lock/unlock operation: clutch
.Compatible with any type of car&alarm system(driver door control and two front-door control for option)

Technical Date:

1. Working voltage: DC12V
2. Output current: 4A
3. Working humidity:<75%
4. Working temperature range:-20℃-70℃
5. Working distance: 22mm
6. Pull/push force: 4KG
7. Working life:> 100,000times



KGZ-3001-4D

One bunch of five lines, three bunches of two lines
一把五线,三把二线

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation
9. Square type
10. Lock/unlock operation: clutch
11. Compatible with any type of car & alarm system (driver door control and two front-door control for option)

Technical Date:

1. Working voltage: DC12V
2. Output current: 4A
3. Working humidity: <75%
4. Working temperature range: -20°C-70°C
5. Working distance: 22mm
6. Pull/push force: 4KG
7. Working life: >100,000times



KGZ-4001-4D

One bunch of five lines, three bunches of two lines
一把五线,三把二线

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation
9. Square type
10. Lock/unlock operation: clutch
11. Compatible with any type of car & alarm system (driver door control and two front-door control for option)

Technical Date:

1. Working voltage: DC12V
2. Output current: 4A
3. Working humidity: <75%
4. Working temperature range: -20°C-70°C
5. Working distance: 22mm
6. Pull/push force: 4KG
7. Working life: >100,000times



KGZ03-5P

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation




KGZ04-5P

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation




KGZ03-2P

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation

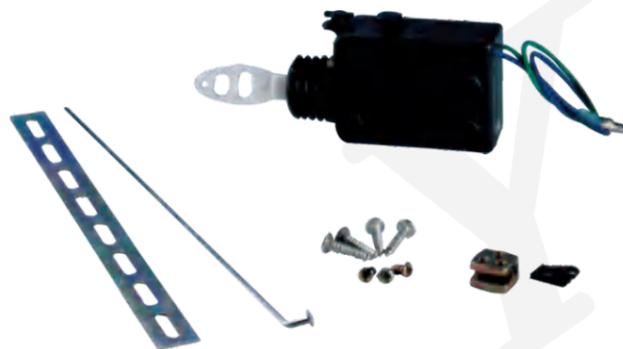

KGZ04-2P

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. 360° adjustable positioning hardware for easy installation

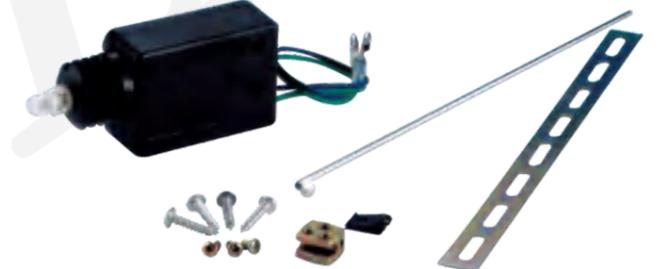

KGZ5001-4D

One bunch of five lines, three bunches of two lines
Controlled by Controller B
一把五线,三把二线,用B控制器


1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system
8. easy installation
9. Square type
10. Lock/unlock operation: clutch
Compatible with any type of car & alarm system (driver door control and two front-door control for option)

Technical Date:
1. Working voltage: DC12V
2. Output current: 4A
3. Working humidity: <75%
4. Working temperature range: -20°C-70°C
5. Working distance: 22mm
6. Pull/push force: 4.5KG
7. Working life: >100,000times



Various kinds of controllers

各种控制器

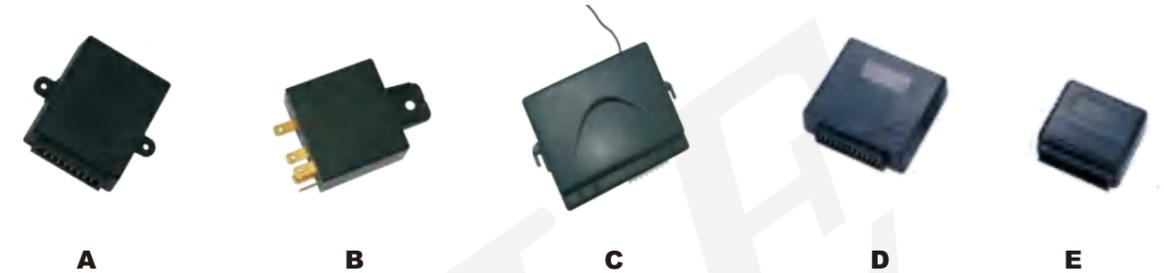

Screw Pack Selection



HS-1
4 Door Harness



3-hole Zine Clamp


KGZ05-2P

1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system



KGZ05-5P


1. Anti-block design
2. With ultrasonic welding, water proof and dust proof
3. High torque motor
4. Strong output
5. With long service life
6. Be suitable for various autos
7. Compatible with car alarm system

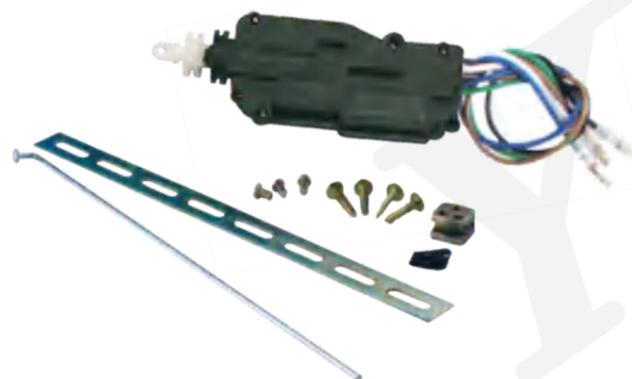


Cable Lock



LD
Cable Lock bracket kit

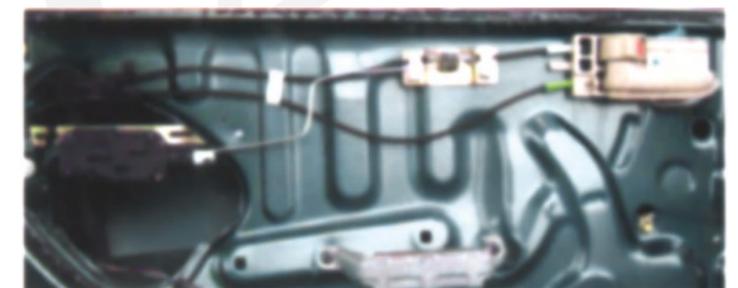

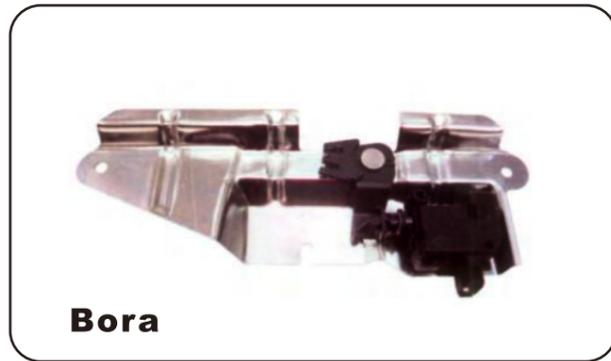

Bora

DR-A Trunk release (Push Type) Manual operation

- Strong power for heavy duty doors
- Available for special cars with special brackets, various application: TOYOTA Vios, BORA, JETTA

Push Force :>6.5kg
 Operation Voltage :>9V~15V
 Travel Distance :19±1mm
 Stall Current :≤6.1A
 Operation Temperature :-40°C~+80°C
 Life Time :60,000 cycles



Vios

DR-B Trunk release (Push Type) Remote + Manual operation

- Strong power for heavy duty doors
- Available for special cars with special brackets, various application: TOYOTA Vios, BORA, JETTA

Push Force :>6.5kg
 Operation Voltage :>9V~15V
 Travel Distance :19±1mm
 Stall Current :≤6.1A
 Operation Temperature :-40°C~+80°C
 Life Time :60,000 cycles



DR-C Trunk release (Pull Type) Manual operation Ultra slim

Pull Force :>4.5kg
 Operation Voltage :>10.5V~13.5V
 Travel Distance :20.5±1mm
 Stall Current :≥2.5A
 Operation Temperature :-20°C~+60°C
 Life Time :45,000 cycles



DR-D Trunk release (Pull Type) Remote + Manual operation Ultra slim

Pull Force :>4.5kg
 Operation Voltage :>10.5V~13.5V
 Travel Distance :20.5±1mm
 Stall Current :≥2.5A
 Operation Temperature :-20°C~+60°C
 Life Time :45,000 cycles



MSK-01 Remote central lock
遥控中控门锁



433.92MHZ

- Anti-block design 防卡死设计
- With ultrasonic welding, water proof and dust proof 超声波焊接工艺、防水和防尘
- High torque motor 大功率电机
- Strong output 强力输出
- With long service life 超长使用寿命
- Be suitable for various autos 适用于各种类型的汽车
- Compatible with car alarm system 兼容汽车防盗系统
- 360°adjustable positioning hardware for easy installation (driver door central and two front-door central for option) 360°可调节的锁头, 安装容易。(驾驶室门锁控制或两个前门门锁控制可供选择)

MSK-02 Remote central controller
遥控中控控制器



433.92MHZ

- Remote starter with 2 dual button remote control 4键遥控, 带有遥控启动控制按钮
- Code learning 学习码
- Door lock/unlock outputs. 车门锁定/解锁功能
- No alarm needed to activate this unit 不需要报警器来激活这个单元
- Includes extended range antenna, plus all the features of the rcs100 包含外置天线, 带有rcs100所有的功能

YLM4650 Universal power windows 通用电动车窗控制器



- Custom mounting Brackets
自定义安装支架
- Works w/Factory Window Assembly
工厂装配的窗口部件
- Dependable Operation
运行可靠
- Multi-Position Brackets
多工位托架
- Worm drive Transmission
蜗杆传动变速器
- Durable Motors
持久耐用的发动机
- Includes Hardware
包括各种部件
- Detailed Instructions
详细的说明书
- Limited Lifetime Warranty
一定的保修时间

Stop cranking ! Series of Universal Power Window Conversion kits allow you to convert your manual windows to power operated windows. The installation is easy because the motors connect directly to your existing window crank shaft. , Unlike other "universal" kits, we offer heavy duty motors which meet or exceed factory standards. Because of their high-torque motors and custom mounting brackets, Universal Power Windows are great for all cars that do not have power windows.

With the deluxe kit, you get switches, switch frames and mounting cases to give your vehicle an OEM lock. Each kit can be upgraded to remote operation using any of keyless entry units and window controllers. Each kit comes with detailed instructions and a limited Lifetime Warranty.

停止摇动！通用系列的电动车窗控制器，可以将您的手动升降车窗改变为电动升降车窗。安装简单，只需把控制器马达和车窗中的传动轴连接起来就可以。不像其他的“通用”车窗控制器，我们提供的是高扭力马达，超过了一般工厂的技术标准。因为使用了高扭力马达和个性化安装支架，对于没有电动车窗控制器的汽车，通用系列的电动车窗控制器是最好的选择。

选择豪华套件，您将可以得到开关，开关框架和安装配件，让您的汽车拥有一个OEM原装锁。每套产品可以升级到使用遥控操作的任何无钥匙进入装置和窗口控制器。每套产品都有详细说明和一定的保修时间。

YLM4654 Universal power windows 通用电动车窗控制器



- Custom mounting Brackets
自定义安装支架
- Works w/Factory Window Assembly
工厂装配的窗口部件
- Dependable Operation
运行可靠
- Multi-Position Brackets
多工位托架
- Worm drive Transmission
蜗杆传动变速器
- Durable Motors
持久耐用的发动机
- Includes Hardware
包括各种部件
- Detailed Instructions
详细的说明书
- Limited Lifetime Warranty
一定的保修时间

Stop cranking ! Series of Universal Power Window Conversion kits allow you to convert your manual windows to power operated windows. The installation is easy because the motors connect directly to your existing window crank shaft. , Unlike other "universal" kits, we offer heavy duty motors which meet or exceed factory standards. Because of their high-torque motors and custom mounting brackets, Universal Power Windows are great for all cars that do not have power windows.

With the deluxe kit, you get switches, switch frames and mounting cases to give your vehicle an OEM lock. Each kit can be upgraded to remote operation using any of keyless entry units and window controllers. Each kit comes with detailed instructions and a limited Lifetime Warranty.

停止摇动！通用系列的电动车窗控制器，可以将您的手动升降车窗改变为电动升降车窗。安装简单，只需把控制器马达和车窗中的传动轴连接起来就可以。不像其他的“通用”车窗控制器，我们提供的是高扭力马达，超过了一般工厂的技术标准。因为使用了高扭力马达和个性化安装支架，对于没有电动车窗控制器的汽车，通用系列的电动车窗控制器是最好的选择。

选择豪华套件，您将可以得到开关，开关框架和安装配件，让您的汽车拥有一个OEM原装锁。每套产品可以升级到使用遥控操作的任何无钥匙进入装置和窗口控制器。每套产品都有详细说明和一定的保修时间。

YLM5650 Universal power windows 通用电动车窗控制器



- Custom mounting Brackets
自定义安装支架
- Works w/Factory Window Assembly
工厂装配的窗口部件
- Dependable Operation
运行可靠
- Multi-Position Brackets
多工位托架
- Worm drive Transmission
蜗杆传动变速器
- Durable Motors
持久耐用的发动机
- Includes Hardware
包括各种部件
- Detailed Instructions
详细的说明书
- Limited Lifetime Warranty
一定的保修时间

Stop cranking ! Series of Universal Power Window Conversion kits allow you to convert your manual windows to power operated windows. The installation is easy because the motors connect directly to your existing window crank shaft. , Unlike other "universal" kits, we offer heavy duty motors which meet or exceed factory standards. Because of their high-torque motors and custom mounting brackets, Universal Power Windows are great for all cars that do not have power windows.

With the deluxe kit, you get switches, switch frames and mounting cases to give your vehicle an OEM lock. Each kit can be upgraded to remote operation using any of keyless entry units and window controllers. Each kit comes with detailed instructions and a limited Lifetime Warranty.

停止摇动！通用系列的电动车窗控制器，可以将您的手动升降车窗改变为电动升降车窗。安装简单，只需把控制器马达和车窗中的传动轴连接起来就可以。不像其他的“通用”车窗控制器，我们提供的是高扭力马达，超过了一般工厂的技术标准。因为使用了高扭力马达和个性化安装支架，对于没有电动车窗控制器的汽车，通用系列的电动车窗控制器是最好的选择。

选择豪华套件，您将可以得到开关，开关框架和安装配件，让您的汽车拥有一个OEM原装锁。每套产品可以升级到使用遥控操作的任何无钥匙进入装置和窗口控制器。每套产品都有详细说明和一定的保修时间。

YLM5654 Universal power windows 通用电动车窗控制器



- Custom mounting Brackets
自定义安装支架
- Works w/Factory Window Assembly
工厂装配的窗口部件
- Dependable Operation
运行可靠
- Multi-Position Brackets
多工位托架
- Worm drive Transmission
蜗杆传动变速器
- Durable Motors
持久耐用的发动机
- Includes Hardware
包括各种部件
- Detailed Instructions
详细的说明书
- Limited Lifetime Warranty
一定的保修时间

Stop cranking ! Series of Universal Power Window Conversion kits allow you to convert your manual windows to power operated windows. The installation is easy because the motors connect directly to your existing window crank shaft. , Unlike other "universal" kits, we offer heavy duty motors which meet or exceed factory standards. Because of their high-torque motors and custom mounting brackets, Universal Power Windows are great for all cars that do not have power windows.


With the deluxe kit, you get switches, switch frames and mounting cases to give your vehicle an OEM lock. Each kit can be upgraded to remote operation using any of keyless entry units and window controllers. Each kit comes with detailed instructions and a limited Lifetime Warranty.

停止摇动！通用系列的电动车窗控制器，可以将您的手动升降车窗改变为电动升降车窗。安装简单，只需把控制器马达和车窗中的传动轴连接起来就可以。不像其他的“通用”车窗控制器，我们提供的是高扭力马达，超过了一般工厂的技术标准。因为使用了高扭力马达和个性化安装支架，对于没有电动车窗控制器的汽车，通用系列的电动车窗控制器是最好的选择。

选择豪华套件，您将可以得到开关，开关框架和安装配件，让您的汽车拥有一个OEM原装锁。每套产品可以升级到使用遥控操作的任何无钥匙进入装置和窗口控制器。每套产品都有详细说明和一定的保修时间。


XENON-HID CONVERSION KITS

MISSISSI HID conversion kits are produced to meet security and vehicle standards. High Intensity Discharge(HID) is a new type of lighting technology that's primarily different from the conventional halogen bulbs. HID lamps don't have a filament but create light by the arc between two electrodes. The light produced by an HID Xenon Lighting system is greater than a standard halogen bulb and with less power consumption. On the road, HIE Xenon lighting systems appear as a bright white beam which resembles natural daylight. The bright white beam offers greater visibility and road safety. In an HID Xenon lighting system, the voltage between the two electrodes rises firstly from 12V to 23000V and keeps stable at 8000V by using the Xenon HID ballasts system. Due to the ultra high voltage all components should be selected very carefully to meet the Security standards. The HID Xenon lighting is much more economic, more stable and brighter than conventional vehicle head light systems.

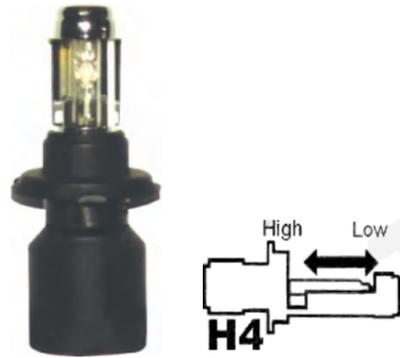

Electro Magnetic Slider(EMS)

With WMS you have both Low beam and High beam function in a single lamp. Traditionally with a typical H4 conversion you are trying to replace a twin filament halogen lamp with a single arc discharge burner. The normal result is that you have to lose your Main or High beam function. The smart WMS control system moves the bulb by using electromagnetics to create a swift and accurate vertical movement of the light source. The burner doesn't shut down during the switching operation and so there is no delay in lighting up which is typical to Xenon conversion kit when you change from High Beam to low beam or vice versa.



Halogen bulb



White/6,000K



Blue/8,000K




Bulb Types

H1-H3-H7-H8/H11-9004-9005/9006-9007-D2S-D2R-D2C
Xenon HID Conversion Kit



H4-Xenon-HID Conversion Kit

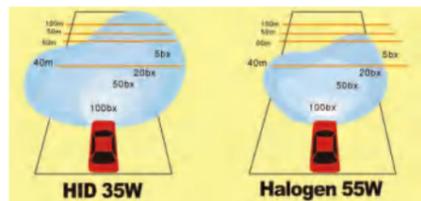


Xenon-HID Bulb:

Power Consumption:35W
Brightness(cd):200,000kandela
Luminance(k):1,900-3,200lumen
Temperature of light:6000K(pure white)
Life:3,000 hours (sustained)

Standard Halogen Bulb:


Power Consumption:55W
Brightness(cd):67,500 kandela
Luminance(k):1,550 lumen
Temperature of Light:3,200K(yellow)
Life:400 hours(sustained)

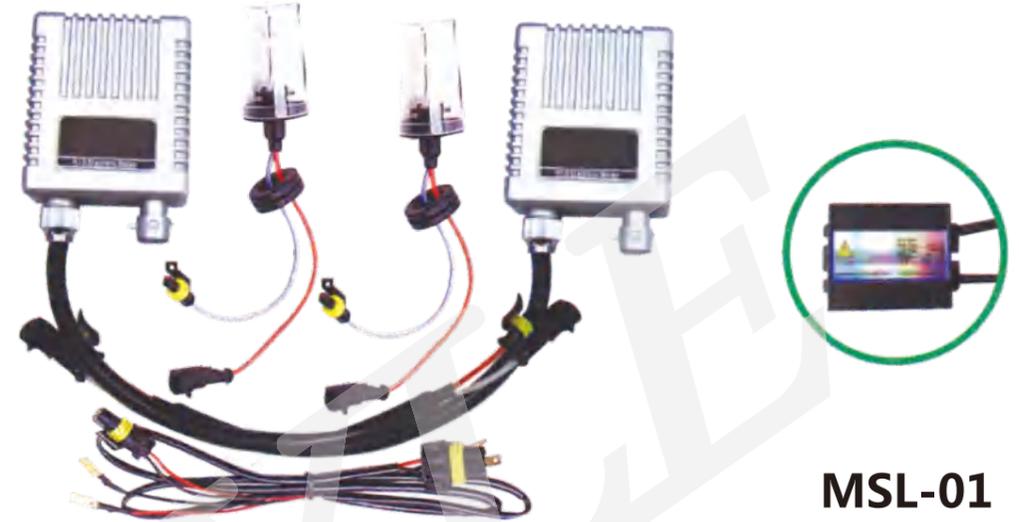

MSL-01

FEATURES

- Super-high brightness,MISSISSI's is three times than an ordinary halogen lamp.
- Electricity saving,MISSISSI can save more 45% than halogen lamp.
- Long life span,MISSISSI is ten times than the halogen lamp.
- Natural light ,MISSISSI'S light is close to noonday sunlight.
- Good safety,MISSISSI has auto multiple protection with double circuitries.

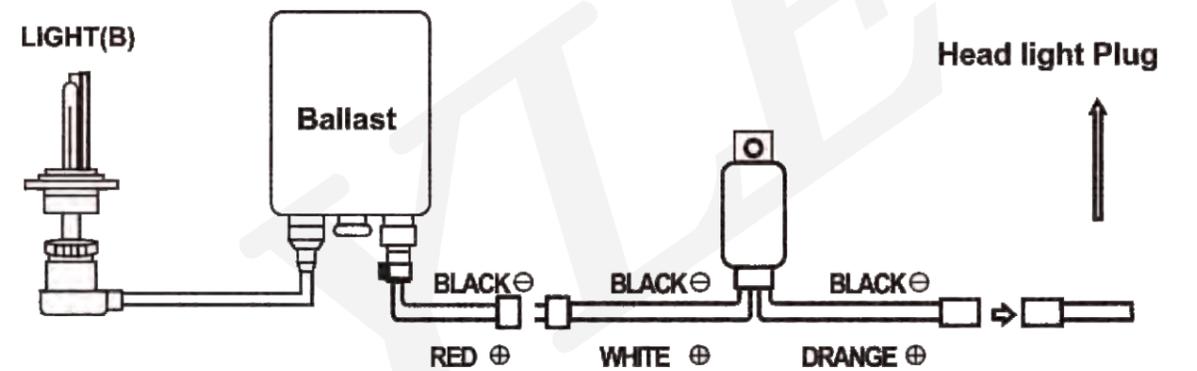



MSH-100 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-100B-1200B(Battery Back Up)	1200	112±3	20	21	40
MSH-100-600(One Tone)	600	108±3	15	19.5	40
MSH-100-600D(Soft Chirp)	600	108±3	15	19.5	40
MSH-100-600S(Six Tone)	600	108±3	15	19.5	40
MSH-100-1000(One Tone)	1000	112±3	20	19.5	40
MSH-100-1200D(Soft Chirp)	1200	112±3	20	19.5	40
MSH-100-1000YI(Speech IC)	1000	112±3	20	19.5	40
MSH-100-1200S(Six Tone)	1200	112±3	20	19.5	40



MSH-200 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	390*360*355

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-200B-1200B(Battery Back Up)	1200	102±3	20	21	36
MSH-200-600(One Tone)	600	108±3	15	20	36
MSH-200-600D(Soft Chirp)	600	108±3	15	20	36
MSH-200-600S(Six Tone)	600	108±3	15	20	36
MSH-200-1000(One Tone)	1000	112±3	20	20	36
MSH-200-1200D(Soft Chirp)	1200	112±3	20	20	36
MSH-200-1000YI(Speech IC)	1000	112±3	20	20	36
MSH-200-1200S(Six Tone)	1200	112±3	20	20	36



MSH-300 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-300B-1200B(Battery Back Up)	1200	102±3	20	26	40
MSH-300-600(One Tone)	600	108±3	15	19	40
MSH-300-600D(Soft Chirp)	600	108±3	15	19	40
MSH-300-600S(Six Tone)	600	108±3	15	19	40
MSH-300-1000(One Tone)	1000	112±3	20	19	40
MSH-300-1200D(Soft Chirp)	1200	112±3	20	19	40
MSH-300-1000YI(Speech IC)	1000	112±3	20	19	40
MSH-300-1200S(Six Tone)	1200	112±3	20	19	40



MSH-400 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
9-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-400B-1200B(Battery Back Up)	1200	103±3	15	17	40
MSH-400-320(One Tone)	600	105±3	15	17.5	48
MSH-400-600(One Tone)	600	108±3	15	17.5	48
MSH-400-600D(Soft Chirp)	600	108±3	15	17.5	48
MSH-400-600S(Six Tone)	600	108±3	15	17.5	48
MSH-400-1200(One Tone)	1200	113±3	20	17.5	48
MSH-400-1200S(Six Tone)	1200	113±3	20	17.5	48



MSH-500 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-500-320(One Tone)	320	105±3	15	21	48
MSH-500-600(One Tone)	600	105±3	15	21	48
MSH-500-600D(Soft Chirp)	600	105±3	15	21	48
MSH-500-600S(Six Tone)	600	105±3	15	21	48
MSH-500-1000(One Tone)	1000	112±3	20	21	48
MSH-500-1200D(Soft Chirp)	1200	112±3	20	21	48
MSH-500-1000YI(Speech IC)	1000	112±3	20	21	48
MSH-500-1200S(Six Tone)	1200	112±3	20	21	48



MSH-600 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-600-320(One Tone)	320	105±3	15	21	48
MSH-600-600(One Tone)	600	105±3	15	21	48
MSH-600-600D(Soft Chirp)	600	105±3	15	21	48
MSH-600-600S(Six Tone)	600	108±3	15	21	48
MSH-600-1000(One Tone)	1000	112±3	20	21	48
MSH-600-1200D(Soft Chirp)	1200	112±3	20	21	48
MSH-600-100Y(Speech IC)	1000	112±3	20	21	48
MSH-600-1200S(Six Tone)	1200	112±3	20	21	48



MSH-700 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-700-320(One Tone)	320	105±3	15	19.5	48
MSH-700-600(One Tone)	600	110±3	15	19.5	48
MSH-700-600D(Soft Chirp)	600	110±3	15	19.5	48
MSH-700-600S(Six Tone)	600	110±3	15	19.5	48
MSH-700-1000(One Tone)	1000	105±3	20	19.5	48
MSH-700-1200D(Soft Chirp)	1200	105±3	20	19.5	48
MSH-700-1000YI(Speech IC)	1000	105±3	20	19.5	48
MSH-700-1200S(Six Tone)	1200	105±3	20	19.5	48



MSH-800 Alarm Siren

ABS Housing In Black

Operating Range	Paied Voltage	Meas:(mm)
6-15(VDC)	12(VDC)	580*240*450

Model	Rated current mA	SPL dB/1m	Power Out(W)	G.W. Kgs	QTY Pcs
MSH-800-320(One Tone)	320	105±3	15	16.9	40
MSH-800-600(One Tone)	600	110±3	15	16.9	40
MSH-800-600D(Soft Chirp)	600	110±3	15	16.9	40
MSH-800-600S(Six Tone)	600	110±3	15	16.9	40
MSH-800-1000(One Tone)	1000	118±3	20	16.9	40
MSH-800-1200D(Soft Chirp)	1200	118±3	20	16.9	40
MSH-800-1200YI(Speech IC)	1000	118±3	20	16.9	40
MSH-800-1200S(Six Tone)	1200	118±3	20	16.9	40

