



FARINA (JINAN) WELDTEC & MACHINERY CO.,LTD
9# Xincheng Street, Civic Industry Zone, Shanghe County
Shandong China
<http://www.farinaweldtec.com>
E-mail: sales@farinaweldtec.com
TEL: 0086-531-84809797
0086-531-84231005



WELDTEC MACHINERY

FARINA (JINAN) WELDTEC & MACHINERY CO.,LTD



BETTER QUALITY, BETTER SERVICE

COMPANY PROFILE

Farina (Jinan) Weldtec & Machinery Co., Ltd. since 1993, is located in the “hot spring city” -- Shanghe County Industrial Park, Shandong Province. After more than 30 years of relentless effort, Farina has grown into a leading provider of welding materials, welding accessories and welding solutions in China. Farina’ s dedication has earned:

- National Specialized and New “Little Giant” Enterprise of China
- Specialized and New Enterprise of Shandong Province
- Manufacturing Champion of Shandong Province
- High-tech Enterprise of Shandong Province

Farina has obtained ISO 9001/ISO 14001/ISO 45001/GB/T23001/BSCI certificates. Farina’ s products are also certified by ABS/DNV/GL/CCS/CE, ensuring exceptional quality and reliability.

Farina Group includes:

- FARINA (JINAN) WELDTEC & MACHINERY CO., LTD.
- SHANDONG FARINA IMP & EXP CO., LTD.
- JINAN FARINA IMP & EXP CO., LTD.
- JINAN FLYBUL INTERNATIONAL TRADE CO., LTD.



Farina always insists on “Better Quality, Better Service” and engaged to provide customers with a wide range of high-quality welding materials and accessories under **FARINA®** and **FLYBUL®** brands:

- Various welding machines:
- Various welding consumables:
- Welding accessories:

Farina’ s products are widely used in industries such as Shipbuilding, Offshore Engineering, Petrochemical, Automotive, and Power, earning high praise from customers both domestically and internationally. Farina is also a long-term partner of many globally well-known brands. The continuous innovation and technological research make Farina able to satisfy many and various customer requirements.



► CERTIFICATES

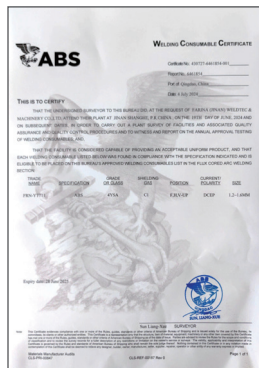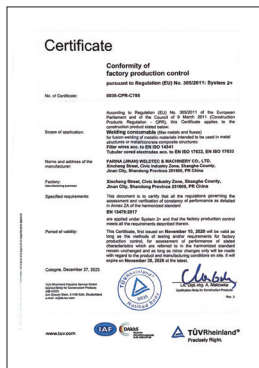

CONTENTS

WELDING MACHINE	01-06
MMA SERIES	01-02
MIG SERIES	03-04
NBC SERIES	05
LASER WELDING MACHINE	06

WELDING ACCESSORIES	07-28
MIG TORCH	07-14
PLASMA TORCH	15-17
NOZZLES	18
CONTACT TIP	19
CONTACT TIP HOLDER	20
ELECTRODE HOLDER	21
EARTH CLAMP	22
WELDING HOLDER	23
GRINDING WHEEL	24
WELDING ROD DRYER	25-26
CERAMIC WELDING BACKING	27-28
WELDING GLOVES & WELDING HELMETS	29-30

WELDING CONSUMABLES	31-36
WELDING WIRE	31-32
TIG WELDING RODS	33
ELECTRODE	34
TUNGSTEN ELECTRODE	35-36

► WELDING MACHINE



MMA SERIES

MMA SERIES--SINGLE VOLTAGE 220V
MMA-250/315/400

Technical Advantages

- One-key selection mode of welding stick.
- Automatic voltage recognition, automatic conversion.
- Power saving design, no arc in 5 seconds interval, automatically cut off the main circuit power supply, safe and reliable.
- VRD low voltage technology, safe.
- 3 seconds short circuit protection: the welding rod and the workpiece will not be in contact for 3 Seconds without arcing, and the main circuit power supply will be automatically cut off.
- Welding current adjustment is accurate to 1A.
- Arc starting current continuously adjustable, which significantly improves arc starting performance.
- Thrust current 100m output cable is normally welded.



Technical parameter

Model	MMA-250	MMA-315	MMA-400
Voltage range(V)	1-Phase220±15%		
Rated input power(KVA)	4.7	5.8	6.4
Rated input current(A)	33	40	43
No-load voltage(V)	60	62	64
Welding current range(A)	20-150	20-180	20-200
Thrust/arc start current range(A)	0-100		
Weld stick(mm)	2-3.2	2-4.0	2-5.0
Rated load duration(%)	40		
Weight(Kg)	3.4	5.9	6
External dimensions(mm)	290*150*230	335*185*295	335*185*295

MMA SERIES--DUAL VOLTAGE 220V/380V
MMA-250/315/400

Technical Advantages

- One-key selection mode of welding stick.
- Automatic voltage recognition, automatic conversion.
- Power saving design, no arc in 5 seconds interval, automatically cut off the main circuit power supply, safe and reliable.
- VRD low voltage technology, safe.
- 3 seconds short circuit protection: the welding rod and the workpiece will not be in contact for 3 Seconds without arcing, and the main circuit power supply will be automatically cut off.
- Welding current adjustment is accurate to 1A.
- Arc starting current continuously adjustable, which significantly improves arc starting performance.
- Thrust current 100m output cable is normally welded.



Technical parameter

Model		MMA-250	MMA-315	MMA-400
Voltage range(V)		1-Phase220/380±15%		
Rated input power(KVA)	220V	4.3	5.6	6
	380V	5.2	6	9
Rated input current(A)	220V	34	43.6	43.6
	380V	20	23	17.5
No-load voltage(V)		74		
Welding current range(A)	220V	20-150	20-190	20-190
	380V	20-150	20-190	20-260
Thrust/arc start current range(A)		0-100		
Weld stick(mm)		2-3.2	2-4.0	2-5.0
Rated load duration(%)		40		
Weight(Kg)		3.5	6.2	7.6
External dimensions(mm)		290*150*230	335*185*295	360*190*290

MMA SERIES

► WELDING MACHINE



MIG SERIES--DIGITAL FLUX CORE MIG WELDING MACHINE
MIG-255B/275B/285B/295B



MIG SERIES

Technical parameter

Model	MIG-255B	MIG-275B	MIG-285B	MIG-295B
Voltage range(V)	1-220±15%			
Frequency(HZ)	50/60HZ			
Rated input power(KVA)	3.2	3.2	3.6	4.1
Rated input current(A)	24.4	24.4	29	31
No-load voltage(V)	55			
Welding current range(A)	40-120	50-120	50-140	50-160
Working voltage range(V)	16-20	16.5-20	16.5-21	16.5-22
Weld stick(mm)	0.8-1.0			
Welding rod(mm)	2.0-3.2			
Rated duty cycle(%)	40			
Flux cored wire	1KG	1KG/5KG		
Weight(Kg)	3.5	5.4	6.7	8.2
External dimensions(mm)	320*163*200	385*193*300	460*220*290	460*220*290

MIG SERIES--DIGITAL FLUX CORE MIG WELDING MACHINE
MIG-285S/295S/305S



None gas welding

MIG SERIES

Technical parameter

Model	MIG-285S	MIG-295S	MIG-305S
Voltage range(V)	1-220±15%		
Frequency(HZ)	50/60HZ		
Rated input power(KVA)	3.6	4.1	4.9
Rated input current(A)	29	31	37
No-load voltage(V)	55		
Welding current range(A)	50-140	50-160	50-180
Working voltage range(V)	16.5-21	16.5-22	16.5-23
Weld stick(mm)	0.8-1.0		
Solid wire(mm)	0.8		
Welding rod(mm)	2.0-3.2		
Rated duty cycle(%)	40		
Flux cored wire	1KG/5KG		
Weight(Kg)	5.4	6.7	8.2
External dimensions(mm)	385*193*350	460*220*290	460*220*290

► WELDING MACHINE



NBC SERIES NBC-350/400/500/630

Technical Advantages

- Soft-switching IGBT full-bridge inverter technology, double closed-loop current control (UC3846).
- Droplet transition waveform control technology (electronic inductance), freely adjustable arc shape, suitable for various welding requirements.
- The main transformer adopts ultra-fine crystal iron core, the inverter frequency up to 20KH.
- Arc starting and falling ball function, slow wire feeding for arc starting, high success rate of arc starting, lessspatter, fast are starting speed.
- High-power wire feeding system power supply, even in the case of large wire feeding resistance and long cable it can feed wire stably.
- With self-locking/non-self-locking selection function, it is convenient for long-time welding operation.
- With over-current and over-heat protection function, full digital current and voltage display.
- Three-purpose machine for gas protection and manual welding of steam turbines (Model 500/630).



Technical parameter

Model	MIG-350	MIG-400	MIG-500	MIG-630
Voltage range(V)	3-Phase380±15% 50/60HZ			
Rated input power(KVA)	13.8	15.9	24.3	33
Rated input current(A)	22	27	39	55
No-load voltage(V)	78	80	87	87
Current adjustment range(A)	60-350	60-400	60-500	60-630
Voltage adjustment range(V)	15.7-31.5	15.7-31.5	15.7-39	15.7-44
Wire feeding speed(m/min)	18			
CO2 gas flow(L/min)	15-20			
Weld stick(mm)	0.8-1.2	0.8-1.2	0.8-1.6	0.8-1.6
Rated load duration(%)	60			
Weight(Kg)	27	41	44	
External dimensions(mm)	540*310*560	602*325*670	680*325*670	

LASER WELDING MACHINE FRN-1500W/2000W

- All-star configuration ,full power, high load
- Simple operation, non-welders also can work quickly
- Beautiful shape,not easy to deform, small heat-affected zone
- Fast welding speed, 4-10 times fast than traditional arc welding
- 10 kinds of welding process storage function, quick recall
- Can weld carbon steel, stainless steel,copper,aluminum and other metals
- integrating welding,cutting and cleaning, one machine with multiple functions



4 IN 1


Technical parameters

Model No.	Dimension	Weight	Weld thickness	Input current	Current range	Air supply	Rated output	Rated duty cycle
FRN-1500	916*435*685	85	0.5-3mm	30A	6.7KW	Ar/N2	1500W	100%
FRN-2000	977*460*730	95	≤5mm	45A	10KW	Ar/N2	2000W	100%

► WELDING ACCESSORIES




MIG TORCH--15AK Welding Gun c/w Euro Fitting
Rating:180A CO₂ 150A mixed gas, 60% duty cycle. wires:0.6-1.0mm

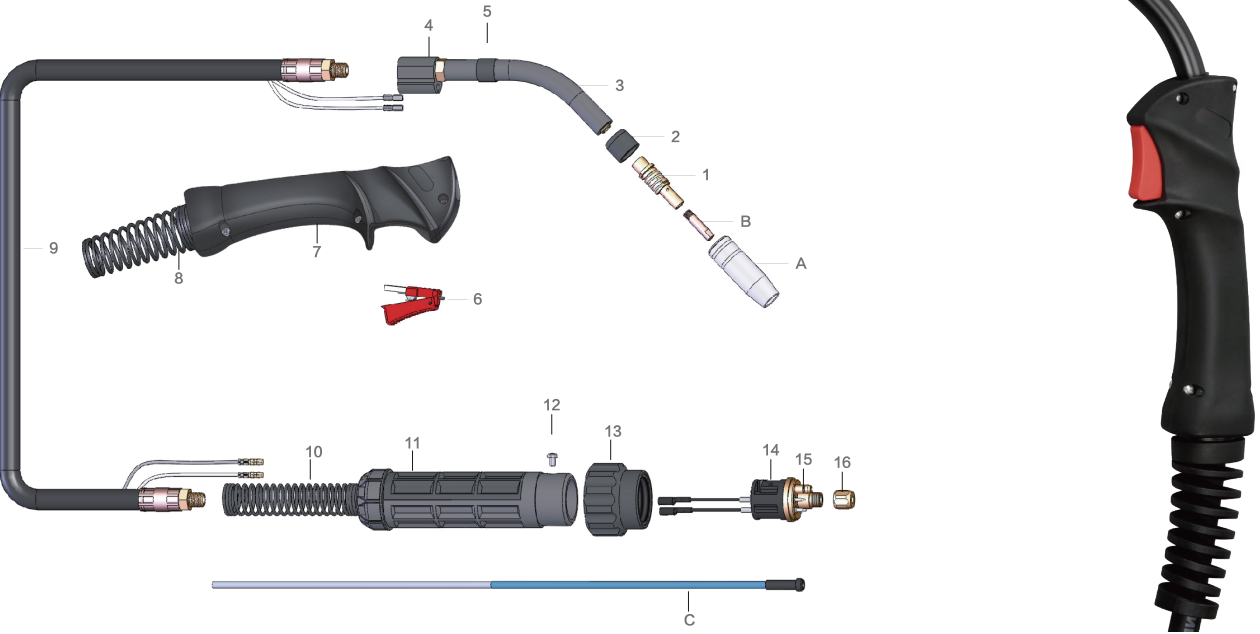

NO.	Description
Nozzles	
A	Nozzle 9.5mm
	Nozzle 12mm
	Tapered Nozzle 13mm
	Nozzle 16mm
Contact Tips	
B	Contact Tip 0.6mm M6×25 Ecu
	Contact Tip 0.8mm M6×25 Ecu
	Contact Tip 0.9mm M6×25 Ecu
	Contact Tip 1.0mm M6×25 Ecu
	Contact Tip 0.6mm M6×25 CuCrZr
	Contact Tip 0.8mm M6×25 CuCrZr
	Contact Tip 0.9mm M6×25 CuCrZr
	Contact Tip 1.0mm M6×25 CuCrZr
Liners	
C	Steel Liner 0.8-1.0mm×3m
	Teflon Liner 0.8-1.0mm×3m

NO.	Description
1	Diffuser
2	Insulator
3	Conductor Tube
4	Plastic Body
5	Gun Neck 45°
6	Trigger
7	Handle
8	Front Spring Cable Support
9	Cable Assembly 3m
10	Back Spring Cable Support
11	Back Handle
12	Screw M4×6
13	Gun Plug Nut
14	Euro Gun Plug
15	O-Ring 4×1
16	Nut M10×1

MIG TORCH--24KD Welding Gun c/w Euro Fitting
Rating:250A CO₂ 220A mixed gas, 60% duty cycle. wires:0.8-1.2mm

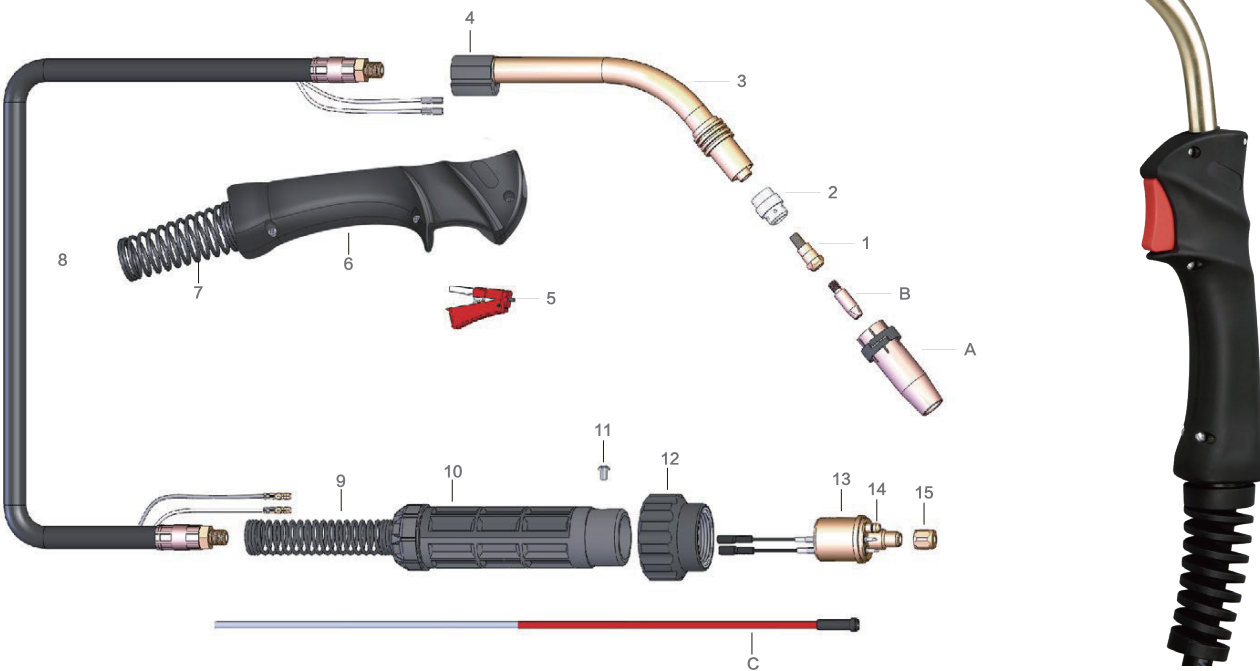


NO.	Description
Nozzles	
A	Nozzle 10mm
	Nozzle 12.5mm
	Nozzle 17mm
	Contact Tip 0.8mm M6×8×28 Ecu
	Contact Tip 1.0mm M6×8×28 Ecu
Contact Tips	
B	Contact Tip 1.2mm M6×8×28 Ecu
	Contact Tip 0.8mm M6×8×28 Ecu
	Contact Tip 1.0mm M6×8×28 CuCrZr
	Contact Tip 1.2mm M6×8×28 CuCrZr
Liners	
C	Steel Liner 0.8-1.0mm×3m
	Steel Liner 1.0-1.2mm×3m
	Teflon Liner 0.8-1.0mm×3m
	Teflon Liner 1.0-1.2mm×3m

NO.	Description
1	Contact Tip Socket
2	Diffuser, Ceramic
3	Gun Neck 50°
4	Plastic Body
5	Trigger
6	Handle
7	Front Spring Cable Support
8	Cable Assembly 3m
9	Back Spring Cable Support
10	Back Handle
11	Screw M4×6
12	Gun Plug Nut
13	Euro Gun Plug
14	O-Ring 4×1
15	Nut M10×1

► WELDING ACCESSORIES




MIG TORCH--25AK Welding Gun c/w Euro Fitting
Rating:230A CO₂ 200A mixed gas, 60% duty cycle. wires:0.8-1.2mm

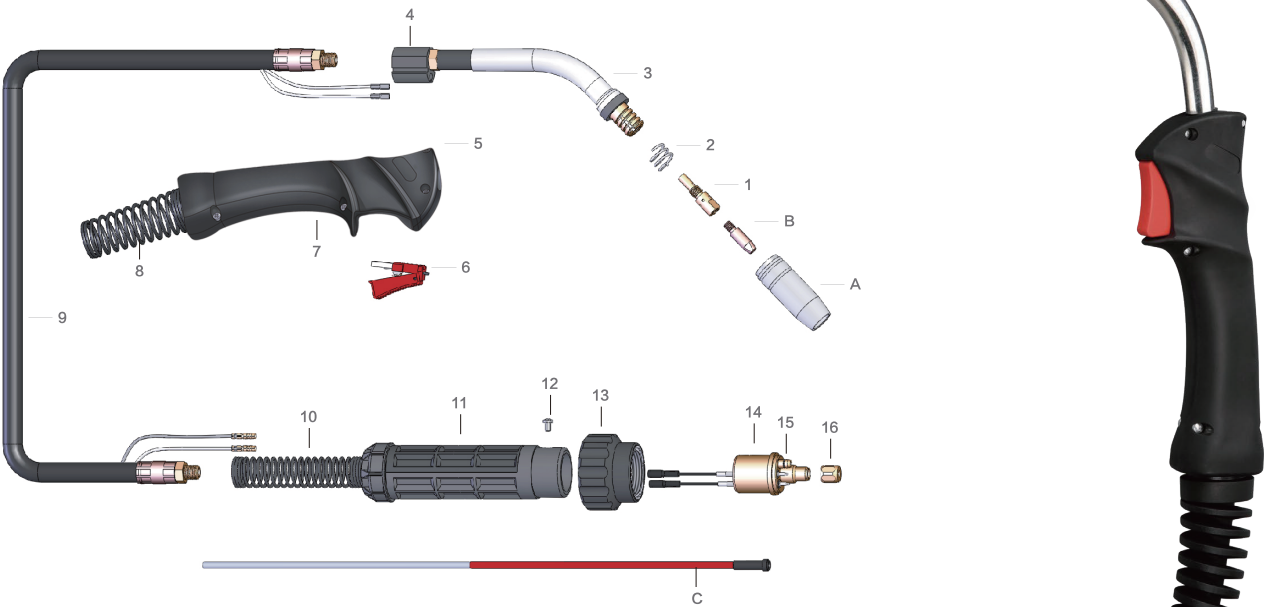

NO.	Description
Nozzles	
A	Nozzle 11.5mm
	Nozzle 15mm
	Nozzle 18mm
	Tapered Nozzle 11mm
	Tapered Nozzle 14mm
Contact Tips	
B	Contact Tip 0.8mm M6×8×28 Ecu
	Contact Tip 1.0mm M6×8×28 Ecu
	Contact Tip 1.2mm M6×8×28 Ecu
	Contact Tip 0.8mm M6×8×28 CuCrZr
	Contact Tip 1.0mm M6×8×28 CuCrZr
	Contact Tip 1.2mm M6×8×28 CuCrZr
Liners	
C	Steel Liner 0.8-1.0mm×3m
	Steel Liner 1.0-1.2mm×3m
	Teflon Liner 0.8-1.0mm×3m
	Teflon Liner 1.0-1.2mm×3m

NO.	Description
1	Contact Tip Socket M6×35
	Contact Tip Socket M6×37
2	Nozzle Spring
3	Gun Neck 45°
4	Plastic Body
5	Hanger Hook
6	Trigger
7	Handle
8	Front Spring Cable Support
9	Cable Assembly 3m
10	Back Spring Cable Support
11	Back Handle
12	Screw M4×6
13	Gun Plug Nut
14	Euro Gun Plug
15	O-Ring 4×1
16	M10×1 / Nut M10×1

MIG TORCH--36KD Welding Gun c/w Euro Fitting
Rating: 340A CO₂ 300A mixed gas, 60% duty cycle. wires:0.8-1.6mm

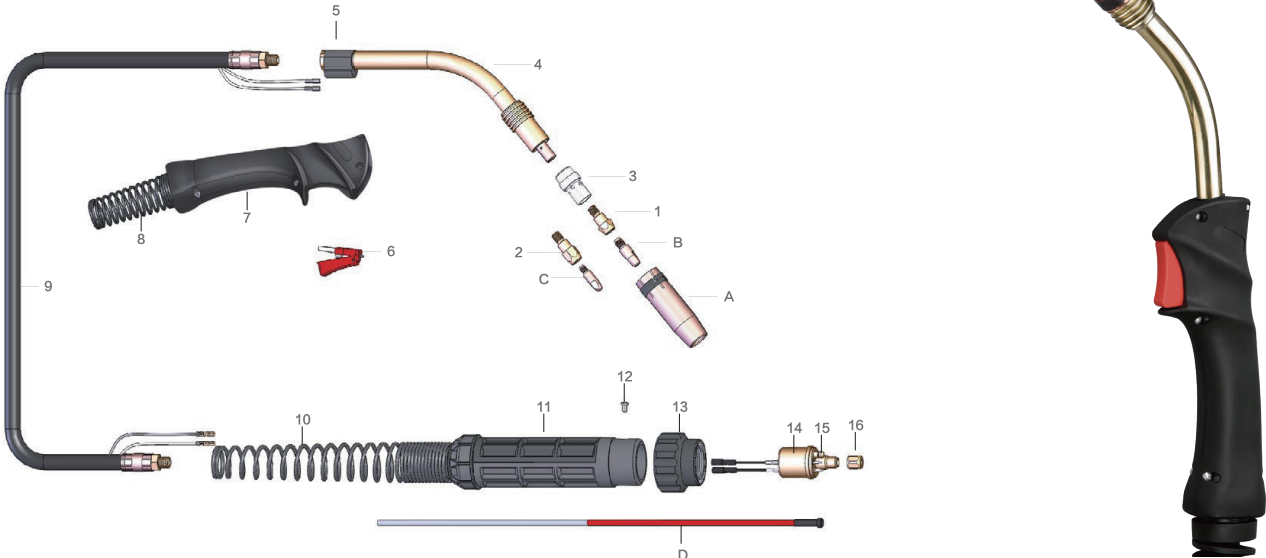


NO.	Description
Nozzles	
A	Nozzle 12mm
	Nozzle 16mm
	Tapered Nozzle 17mm
	Nozzle 19mm
Contact Tips	
B	Contact Tip 1.0mm M8×10×30 Ecu
	Contact Tip 1.2mm M8×10×30 Ecu
	Contact Tip 1.6mm M8×10×30 Ecu
	Contact Tip 1.0mm M8×10×30 Ecu
	Contact Tip 1.2mm M8×10×30 CuCrZr
	Contact Tip 1.6mm M8×10×30 CuCrZr
C	Contact Tip 0.8mm M6×8×28 Ecu
	Contact Tip 1.0mm M6×8×28 Ecu
	Contact Tip 1.2mm M6×8×28 Ecu
	Contact Tip 0.8mm M6×8×28 Ecu
	Contact Tip 1.0mm M6×8×28 CuCrZr
	Contact Tip 1.2mm M6×8×28 CuCrZr
Liners	
D	Steel Liner 1.0-1.2mm×3m

NO.	Description
D	Steel Liner 1.2-1.6mm×3m
	Teflon Liner 1.2-1.6mm ×3m
1	ContactTip Socket M8×28
	ContactTip Socket M8×32
2	ContactTip Socket M6×28
	ContactTip Socket M6×32
3	Diffuser, Ceramic
4	Gun Neck 50°
5	Plastic Body
6	Trigger
7	Handle
8	Front SpringCable Support
9	Cable Assembly 3m
10	Back SpringCable Support
11	Back Handle
12	Screw M4×6
13	Gun Plug Nut
14	Euro Gun Plug
15	O-Ring 4×1
16	Nut M10×1

► WELDING ACCESSORIES




MIG TORCH--PA350A Welding Gun PANASONIC TYPE
Rating: 350A CO₂ 300A mixed gas, 60% duty cycle. wires:1.0-1.4mm

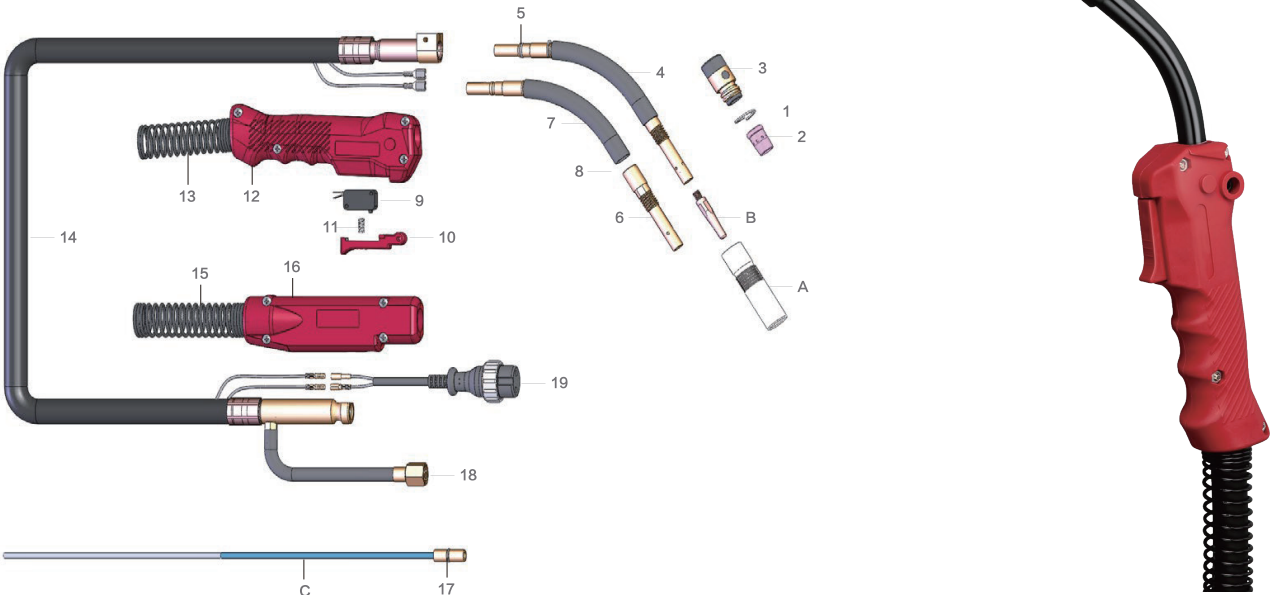

NO.	Description
Nozzles	
A	Nozzle 16mm
	Nozzle 11mm
Contact Tips	
B	Contact Tip 0.8mm M6 Ecu
	Contact Tip 1.0mm M6 Ecu
	Contact Tip 1.2mm M6 Ecu
	Contact Tip 0.8mm M6 CuCrZr
	Contact Tip 1.0mm M6 CuCrZr
	Contact Tip 1.2mm M6 CuCrZr
Liners	
C	Steel Liner 1.0-1.2mm×3m
	Steel Liner 1.2-1.6mm×3m
	Teflon Liner 1.0-1.2mm×3m
1	Gasket
2	Diffuser
3	Insulator
4	Gun Neck 55°

NO.	Description
4	Gun Neck 180°
5	O-Ring 8×1.5
6	Front Gun Tube
7	Conductor Tube 55°
8	Gun Neck Assembly 55°
9	Switch,OMRON
	Switch
10	Trigger
11	Trigger Spring
12	Handle
13	Front Spring Cable Support
14	Cable Assembly 3m
15	Back Spring Cable Support
16	Back Handle
17	O-Ring 6.3×1.8
18	Gas Hose Assembly
19	Control Cable Assy c/w Plug

MIG TORCH--PA500A Welding Gun PANASONIC TYPE
Rating: 500A CO₂ 420A mixed gas, 60% duty cycle. wires:1.2-1.6mm

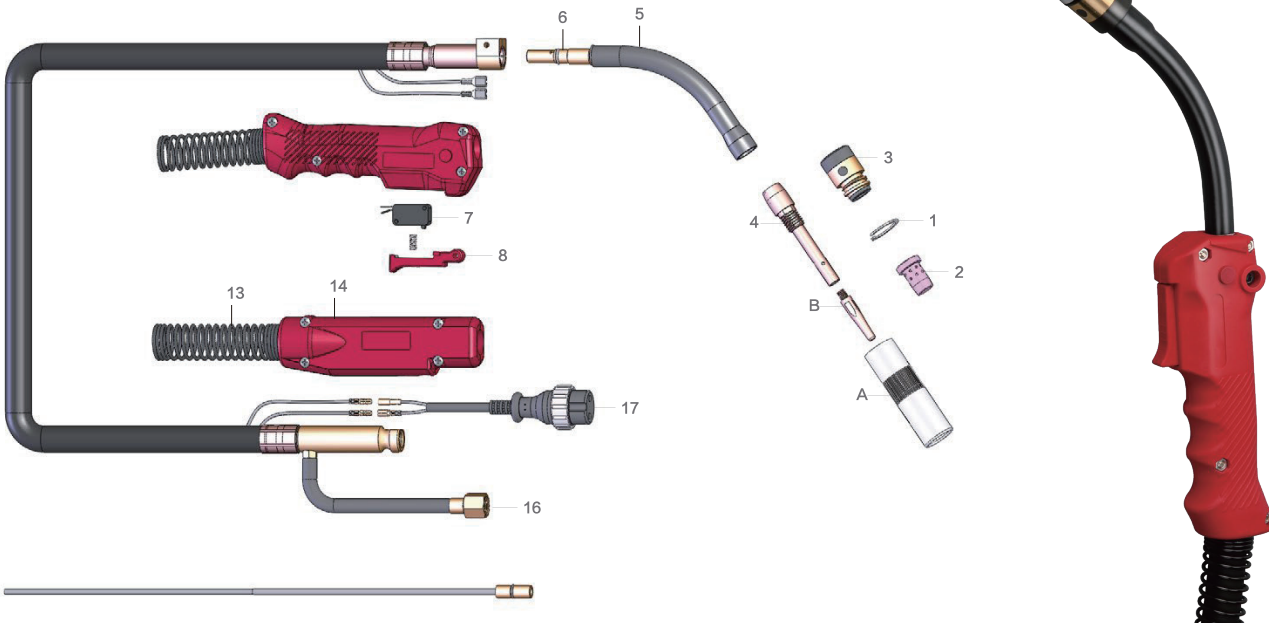


NO.	Description
Nozzles	
A	Nozzle 19mm
	Nozzle 14mm
Contact Tips	
B	Contact Tip 1.2mm M6 Ecu
	Contact Tip 1.4mm M6 Ecu
	Contact Tip 1.6mm M6 Ecu
	Contact Tip 1.2mm M6 CuCrZr
	Contact Tip 1.4mm M6 CuCrZr
	Contact Tip 1.6mm M6 CuCrZr
Liners	
C	Steel Liner 1.0-1.2mm×3m
	Steel Liner 1.2-1.6mm×3m
	Teflon Liner 1.2-1.6mm ×3m
1	Gasket
2	Diffuser
3	Insulator

NO.	Description
4	Front Gun Tube
5	Gun Neck 55°
	Gun Neck 180°
6	O-Ring 8×1.5
7	Switch,OMRON
	Switch
8	Trigger
9	Trigger Spring
10	Handle
11	Front Spring Cable Support
12	Cable Assembly 3m
13	Back Spring Cable Support
14	Back Handle
15	O-Ring 6.3×1.8
16	Gas Hose Assembly
17	Control Cable Assy c/w Plug

► WELDING ACCESSORIES




MIG TORCH--QTC350A Welding Gun QTC TYPE
Rating:350A CO₂ 300A mixed gas, 60% duty cycle. wires:1.0-1.4mm

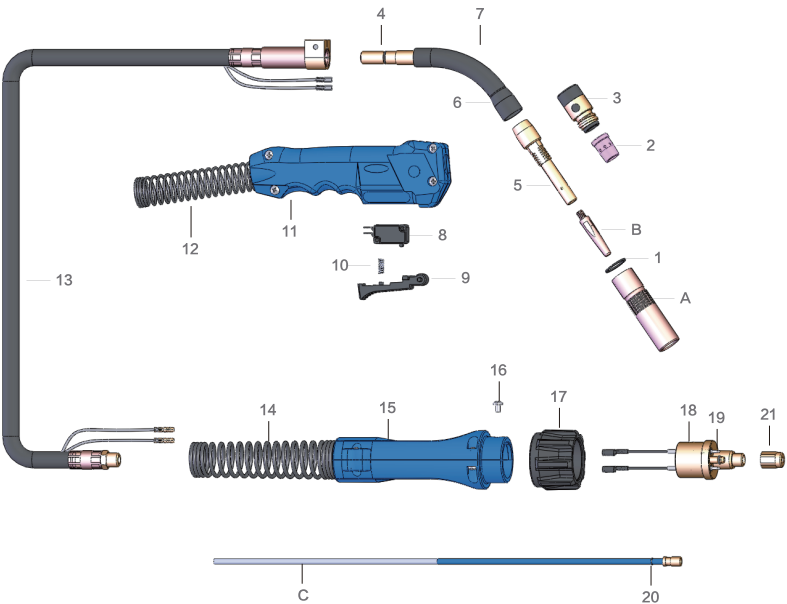

NO.	Description
Nozzles	
A	Nozzle 16mm
	Nozzle 11mm
Contact Tips	
B	Contact Tip 0.8mm M6 Ecu
	Contact Tip 1.0mm M6 Ecu
	Contact Tip 1.2mm M6 Ecu
	Contact Tip 0.8mm M6 CuCrZr
	Contact Tip 1.0mm M6 CuCrZr
	Contact Tip 1.2mm M6 CuCrZr
Liners	
C	Steel Liner 1.0-1.2mm×3m
	Steel Liner 1.2-1.6mm×3m
	Teflon Liner 1.0-1.2mm×3m
1	Gasket
2	Diffuser
3	Insulator
4	O-Ring 8×1.5

NO.	Description
5	Front Gun Tube
6	Conductor Tube 55°
7	Gun Neck Assembly 55°
8	Switch,OMRON
	Switch
9	Trigger
10	Trigger Spring
11	Handle
12	Front Spring Cable Support
13	Cable Assembly 3m
14	Back Spring Cable Support
15	Back Handle
16	Screw M4×6
17	Gun Plug Nut
18	QTC Gun Plug
19	O-Ring 3.15×1.8
20	O-Ring 4×1.8
21	Nut

MIG TORCH--QTC500A Welding Gun QTC TYPE
Rating:500A CO₂ 420A mixed gas, 60% duty cycle. wires:1.2-1.6mm

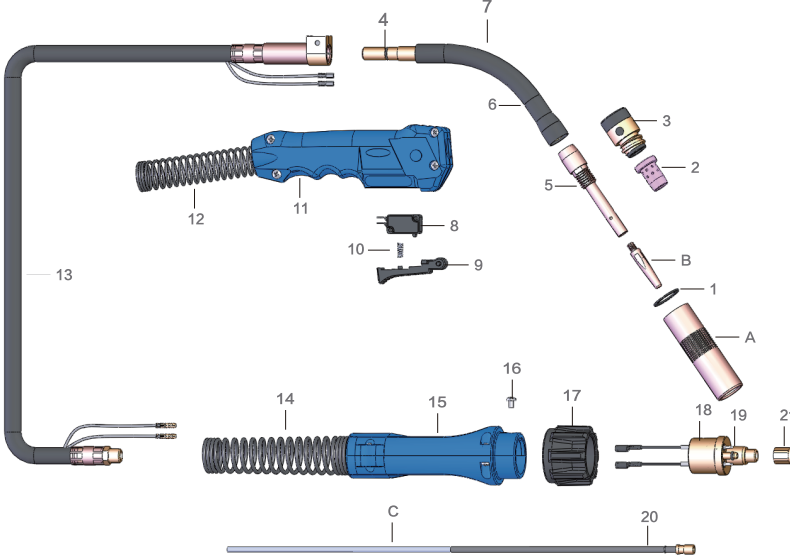


NO.	Description
Nozzles	
A	Nozzle 19mm
	Nozzle 14mm
Contact Tips	
B	Contact Tip 1.2mm M6 Ecu
	Contact Tip 1.4mm M6 Ecu
	Contact Tip 1.6mm M6 Ecu
	Contact Tip 1.2mm M6 CuCrZr
	Contact Tip 1.4mm M6 CuCrZr
	Contact Tip 1.6mm M6 CuCrZr
Liners	
C	Steel Liner 1.0-1.2mm×3m
	Steel Liner1.2-1.6mm×3m
	Teflon Liner 1.0-1.2mm×3m
1	Gasket
2	Diffuser
3	Insulator
4	Insulator
5	O-Ring 8×1.5

NO.	Description
5	Front Gun Tube
6	Conductor Tube 55°
7	Gun Neck 55°
	Switch,OMRON
8	Switch
9	Trigger
10	Trigger Spring
11	Handle
12	Front Spring Cable Support
13	Cable Assembly 3m
14	Back Spring Cable Support
15	Back Handle
16	Screw M4×6
17	Gun Plug Nut
18	QTC Gun Plug
19	O-Ring 3.15×1.8
20	O-Ring 4×1.8
21	Nut

► WELDING ACCESSORIES



PLASMA TORCH--PT31 Welding Gun
Current:40Amp,Duty Cycle:60%, Gas:AIR,
Gas Pressure:4.5-5.0Bar, Gas Flow:150CPM, Ignition:HF

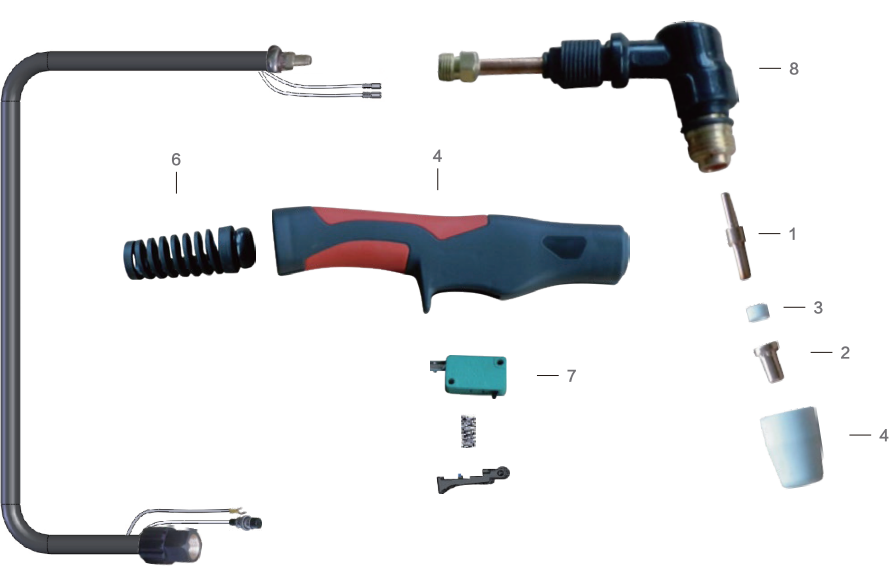

Description	
Cutting gun 5 meters interface thread M16X1.5	
Cutting gun 5 meters interface thread M14X1	
NO.	Description
1	Electrode
2	Nozzle
3	Diversion
4	Protective Case
5	Gun Shell
6	Jacket
7	Switch
8	Cutting Torch Body



PLASMA TORCH--FRN55 Welding Gun
Current:50Amp,Duty Cycle:60%, Gas:AIR,
Gas Pressure:4.5-5.0Bar, Gas Flow:155CPM, Ignition:HF



Description	
Cutting gun 5 meters interface thread M16X1.5	
Cutting gun 5 meters interface thread M14X1	
NO.	Description
1	Electrode
2	Nozzle
3	Protective Case
4	Gun Shell
5	Jacket
6	Switch
7	Cutting Torch Body



► WELDING ACCESSORIES



PLASMA TORCH--P80 Welding Gun
Current:80Amp,Duty Cycle:60%, Gas:AIR,
Gas Pressure:4.5-5.0Bar, Gas Flow:220CPM, Ignition:HF

PLASMA TORCH



Description	
Cutting gun 5 meters interface thread M16X1.5	
Cutting gun 5 meters interface thread M14X1	
NO.	Description
1	Electrode
2	Nozzle
3	Protective Case
4	Gun Shell
5	Jacket
6	Switch
7	Cutting Torch Body

NOZZLES

Product Description	Product Description
Use on:KR-200A /OTC-200A	Use on:KR-350A /OTC-350A
Use on:KR-500A	Use on:KR-600A
Use on :MB-15AK	Use on:MB-23AK/24KD
Use on :MB-25AK	Use on:MB-36KD
Use on:MB-40KD	Use on:NBC-200A

NOZZLES

► WELDING ACCESSORIES



CONTACT TIP

CONTACT TIP

Welding Wire(mm)	Materials	Description	Welding Wire(mm)	Materials	Description
0.8 1.0 1.2 1.4 1.6	Ecu	M6xL45xφ9	0.8 1.0 1.2 1.4 1.6	Ecu	M6xL40xφ9
0.8 1.0 1.2 1.4 1.6	CuCrZr		0.8 1.0 1.2 1.4 1.6	CuCrZr	
0.8 1.0 1.2 1.4 1.6	Ecu	M6xL45xφ8	0.8 1.0 1.2 1.4 1.6	Ecu	M6xL40xφ8
0.8 1.0 1.2 1.4 1.6	CuCrZr		0.8 1.0 1.2 1.4 1.6	CuCrZr	
1.0 1.2 1.4 1.6	Ecu	M6xL45xφ8	1.0 1.2 1.4 1.6	Ecu	5/16-24UNFXL50xφ
1.0 1.2 1.4 1.6	CuCrZr		1.0 1.2 1.4 1.6	CuCrZr	
0.6 0.8 0.9 1.0	Ecu	M6xL25xφ6	0.8 1.0 1.2	Ecu	M6xL28xφ8
0.6 0.8 0.9 1.0	CuCrZr		0.8 1.0 1.2	CuCrZr	
1.0 1.2 1.4 1.6	Ecu	M8xL30xφ10	1.0 1.2 1.4 1.6	Ecu	M10x1.25xL40xφ10
1.0 1.2 1.4 1.6	CuCrZr		1.0 1.2 1.4 1.6	CuCrZr	
0.6 0.8 0.9 1.0	Ecu	M5xL25xφ6	0.8 0.9 1.0	Ecu	M8xL35xφ8
			0.8 0.9 1.0	CuCrZr	

CONTACT TIP HOLDER

CONTACT TIP HOLDER

Product Description	Product Description
Use on:KR-200A	Use on:KR-350A External thread
	
Use on:KR-350A Internal thread	Use on:KR-500A Internal thread
	
Use on:MB-15AK	Use on:MB-24KD/23AK
	
Use on:MB-25AK	Use on:MB-36KD
	
Use on:MB-40KD	Use on:MB-501D
	
Use on:OTC-350A	Use on:OTC-500A
	

► WELDING ACCESSORIES



ELECTRODE HOLDER

ELECTRODE HOLDER



Size	300A/400A/500A/600A/800A
Description	JAPANESE TYPE
Material	Brass/Iron



Size	300A/400A/500A/600A/800A
Description	GERMANY TYPE
Material	Brass/Iron



Size	300A/400A/500A/600A/800A
Description	DUTCH TYPE
Material	Brass/Iron



Size	400A/500A/600A/800A
Description	ITALIAN TYPE
Material	Brass/Iron



Size	300A/400A/500A/600A/800A
Description	KOREAN TYPE
Material	Brass/Iron



Size	200A/300A/400A
Description	ITALIAN TYPE
Material	Brass/Iron



Size	300A/400A/500A/600A/800A
Description	AMERICAN TYPE
Material	Brass/Iron



Size	500A/600A/800A
Description	DUTCH TYPE
Material	Brass/Iron

EARTH CLAMP



Size	300A/500A
Description	DUTCH TYPE
Material	Iron/Brass



Size	500A/600A
Description	ITALIAN TYPE
Material	Brass



Size	300A/500A
Description	AMERICAN TYPE
Material	Iron/Brass



Size	200A/300A/500A
Description	AMERICAN TYPE
Material	Brass/Iron



Size	200A/300A
Description	AMERICAN TYPE
Material	Brass/Iron



Size	300A/500A
Description	JAPANESE TYPE
Material	Iron/Brass



Size	300A/500A
Description	JAPANESE TYPE
Material	Iron/Brass



Size	300A/500A
Description	ITALIAN TYPE
Material	Brass


EARTH CLAMP

► WELDING ACCESSORIES




WELDING HOLDER


ARROW MAGNETIC WELDING HOLDER



Description : 45,90,135
Specifications : 3"
Pull Force : 25lbs




Description : 45,90,135
Specifications : 4"
Pull Force : 50lbs




Description : 45,90,135
Specifications : 5"
Pull Force : 75lbs


MAGNETIC WELDING HOLDER

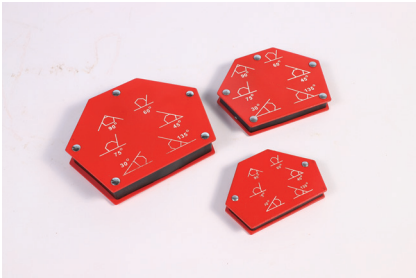

Description : 30,45,60,75,90,135
Specifications : 3-3/4x2-1/2"
Pull Force : 25lbs

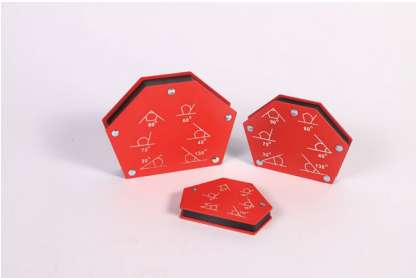

Description : 30,45,60,75,90,135
Specifications : 4-1/4x3-1/2"
Pull Force : 50lbs

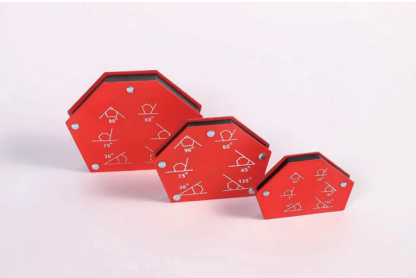

Description : 30,45,60,75,90,135
Specifications : 5-1/2"x4-1/4"
Pull Force : 75lbs

GRINDING WHEEL

CUTTING WHEEL



Wheel Size(DxTxH)		Max.Speed	Outer packing		Carton Size(cm)
(inch)	(mm)	(R.P.M)	(Kg)	(pcs/ctn)	(LxWxH)
4"x1/21"x5/8"	105x2.5x16	15200	25	600	45x23x24
4"x1/8"x5/8"	100x3x16	15200	18	320	49x25x21
5"x1/12"x7/8"	125x2x 22	12200	24	400	28x26x26
5"x1/8"x7/8"	125x3x22	12200	18	200	27x19x27
6"x1/12"x7/8"	150X2x22	10200	24	280	42x31x16
6"x 1/8"x7/8"	150x3x22	10200	17	200	32x19x16
7"x1/12"x7/8"	180x2x22	8500	24	200	38x27x19
7"x1/8"x7/8"	180x3x22	8500	18	100	38x19x19
9"x1/8"x7/8"	230x2x22	6600	15	50	24x24x20
10"x1/8"x1"	250x2x25.4	6200	24	100	32x27x27
12"x1/8"x1"	305x3x25.4	5100	16	25	31x31x9
14"x1/8"x1"	355x3x25.4	4400	19	25	36x36x9
16"x1/8"x1"	400x3x25.4/32	3800	22	25	41x41x9

GRINDING WHEEL



Wheel Size(DxTxH)		Max.Speed	Outer packing		Carton Size(cm)
(inch)	(mm)	(R.P.M)	(Kg)	(pcs/ctn)	(LxWxH)
4"x1/8"x5/8"	100x3x16	15200	15	320	49x25x21
4"x 4/25"x 5/8"	100x4x16	15200	21	200	38x22x22
4"x1/4"x5/8"	100x6x16	15200	21	200	38x22x22
4.5"x1/4"x7/8"	15x6x22	13300	16	100	25x21x25
5"x1/4"x7/8"	125x6x22	12200	17	100	27x21x27
6"x 1/4"x7/8"	150x6x22	10200	23	100	42x31x16
7"x1/4"x7/8"	180x6x22	8500	21	60	38x24x19
9"x1/4"x7/8"	230x6x22	6600	20	30	26x25x25

► WELDING ACCESSORIES



WELDING ROD DRYER

JAPANESE TYPE PORTABLE WELDING ROD DRYER



Model No.	Capacity KG	Supply Voltage V	Temperature °C	Rod Length MM	Weight KG
TRB-5A	5	AC220-240 DC 90-110	150±15	450	2.8
TRB-5B	5	AC.DC 24	150±15	450	3
TRB-5E	5	AC220-240V DC 90-110	150±15	450	2.8
TRB-5F	5	AC.DC60-110	150±15	450	3
H-5	5	AC220	50-320	450	3

JAPANESE TYPE PORTABLE WELDING ROD DRYER



Model No.	Capacity KG	Supply Voltage V	Temperature °C	Rod Length MM	Weight KG
TRB-10	10	AC220-240 DC 90-110	150±15	450	3.8
DT-10	10	AC220-240	50-400	450	4.1
TRB-10E	10	AC220-240 DC 90-110	150±15	450	4

US TYPE PORTABLE WELDING ROD DRYER




Model No.	Capacity KG	Supply Voltage V	Temperature °C	Rod Length MM	Weight KG
TRC-5K	5	AC220-240 DC 90-110	150±15	450	3.2
TRC-10K	10	AC220-240 DC 90-110	150±15	450	4.8
TRC-5KTC	5	AC220	50-300	450	3.6
TRC-10KTC	10	AC220	50-300	450	5.4
PE-1	5	AC110/220	150±15	500	3.3

US TYPE PORTABLE WELDING ROD DRYER



Model No.	Capacity KG	Supply Voltage V	Temperature °C	Rod Length MM	Weight KG
PE-1	5	AC110/220	50-150	500	3.2
PE-2	10	AC110/220	50-150	500	4.8
PE-1W/T	5	AC110/220	50-150	500	3.5
PE-5S	25	AC110/220	50-150	500	9.6
PE-2	10	AC110/220	150±15	500	4.8

US TYPE PORTABLE WELDING ROD DRYER

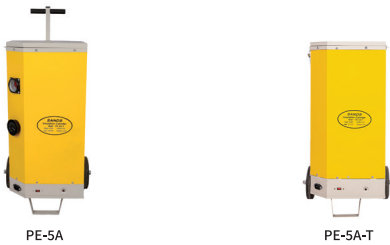

Model No.	Capacity KG	Supply Voltage V	Temperature °C	Rod Length MM	Weight KG
PE-5A	25	AC110/220	50-150	500	9.6
PE-5A-T	25	AC110/220	50-150	500	9.6


► WELDING ACCESSORIES



CERAMIC WELDING BACKING


CERAMIC WELDING BACKING

FRN-A1

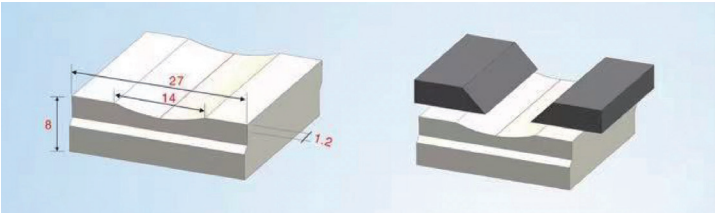


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 14mm, groove depth 1.2mm.

FRN-A1-1

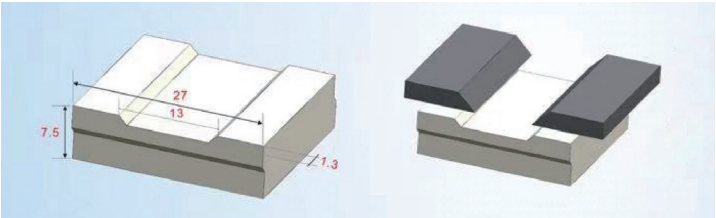


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 13mm, groove depth 1.3mm.

FRN-A1-2

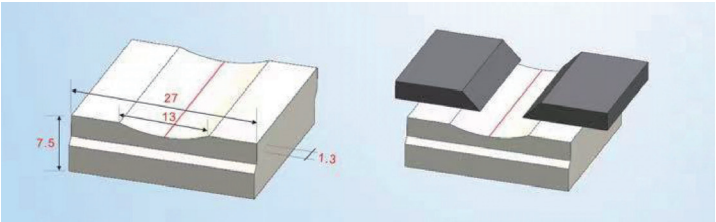


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 13mm, groove depth 1.3mm.

FRN-A2

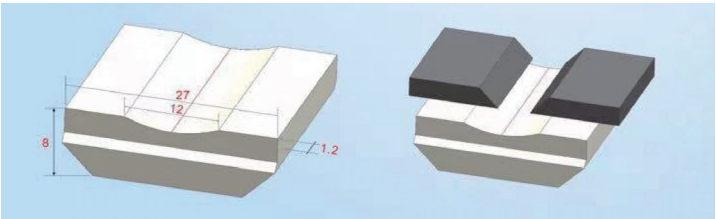


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 12mm, groove depth 1.2mm.

FRN-A3

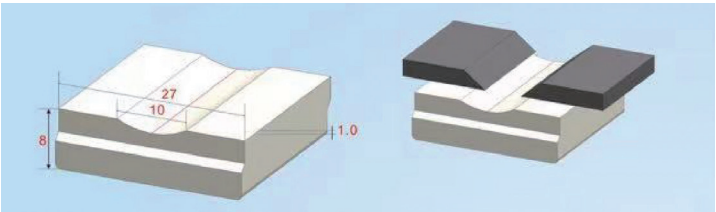


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 10mm, groove depth 1mm.

FRN-A4

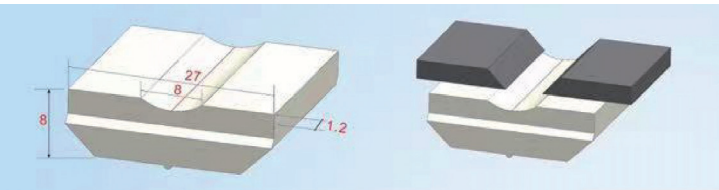


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 8mm, groove depth 1.2mm.

FRN-A5

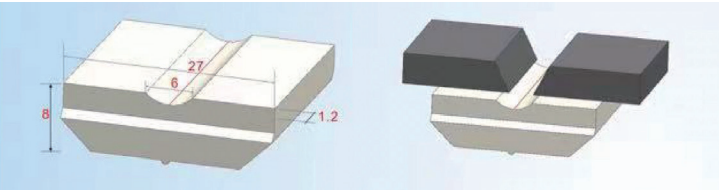


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm, round groove 6mm, groove depth 1.2mm.

FRN-A6

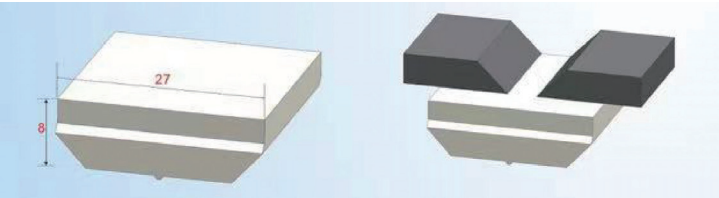


Ceramic backing material or welding backing on aluminum tape. Flat type with 27mm.

FRN-A7

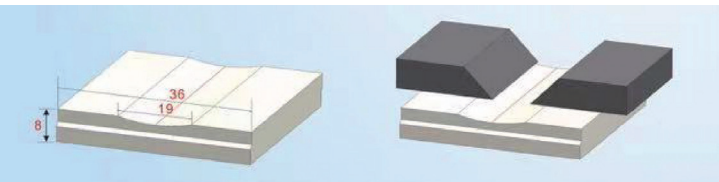

Ceramic backing material or welding backing on aluminum tape. Flat type with 36mm, round groove 19mm.

FRN-A8

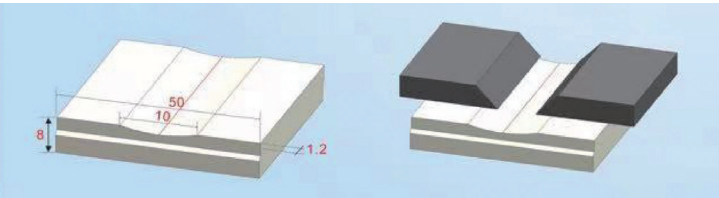

Ceramic backing material or welding backing on aluminum tape. Flat type with 50mm, round groove 10mm, groove depth 1.2mm.

CERAMIC WELDING BACKING

► WELDING ACCESSORIES



WELDING GLOVES & WELDING HELMETS

WELDING GLOVES



Size:M-XL

Premium grade cowhide split leather, strong reinforcedpalm, Cut Resistant Level 4, will not drip, melt or igniteif exposed to sparks or flames, fit cutting pattern forsUPERIOR comfort and dexterity



Size:M-XL

Premium grade cowhide split leather, strong reinforcedpalm, Cut Resistant Level 4, will not drip, melt or igniteif exposed to sparks or flames, fit cutting pattern forsUPERIOR comfort and dexterity



WELDING HELMETS



Filter Mode	FRN-D108	FRN-C107	FRN-C109Q	FRN-Q109	FRN-Q106	FRN-Q85
Optical class	1/1/1/2					
Filter Size(mm)	133x114x10	110x90x9	133x114x10			110x90x19
View area Size(mm)	100x80	100x68	100x97	100x97	100X60	100x50
True color	YES	YES/NO	YES			YES/NO
Light Shade	DIN4					
Dark Shade	DIN5-8/9-13	DIN9-13	DIN5-9/9-13			
UV/IR Protection	DIN16					
Switching Time(Light to Dark)	1/30000S	1/25000S	1/30000S			
Delay Time(Dark to light)	0.1-1s, 5 grades in total	0.1-1.0S Variable adjusted by slide switch	0.1-1.0S Variable adjusted by external knob			
Sensitivity Control	Low to high, 5 grades in total	Variable adjusted byslide switch	Variable adjusted by external knob			
Power Supply	Solar cells+polymer battery			Solar cells+Replaceable 1*CR2450 lithium battery		Solar cells+Replaceable 2*CR2032 lithium battery
Rated Capacity of battery	200mAh			630mAh		2x210mAh
Replaceable battery	NO			YES		
Grinding Functon	YES	YES/NO	YES			
Cutting Function	YES	NO	YES			
Low TIG amps rated	5amps(DC/AC)					
Arc Sensor	4					
ADF Test	NO		YES			
Low battery	YES	YES/NO	YES			



Filter Mode	FRN-S108N	FRN-S106N	FRN-X85	FRN-E105Z	FRN-E93D	FRN-E93Z	FRN-E93H
Optical class	1/1/1/2						
Filter Size(mm)	133x114x10		110x90x9				
View area Size(mm)	100x80	100x60	100x50	93x43			
True color	YES		YES/NO				
Light Shade	DIN4						
Dark Shade	DIN5-9/9-13			DIN9-13			
UV/IR Protection	DIN16						
Switching Time(Light to Dark)	1/30000S	1/30000S	1/25000S				
Delay Time(Dark to light)	0.1-1.0S Variable adjusted by internal knob						
Sensitivity Control	Variable adjusted by internal knob						
Power Supply	Solar cells+Replaceable 2*CR2032 lithium battery				Solar cells+Replaceable 1*CR2450 lithium batter	Solar cells+Replaceable 1*CR2032 lithium battery	
Rated Capacity of battery	2x210mAh		210mAh		630mAh	210mAh	
Replaceable battery	YES			YES			
Grinding Function							
Cutting Function				NO			
Low TIG ampsrated	5amps(DC/AC)			10amps(DC/AC)			
Arc Sensor	4			2			
ADF Test	YES						NO
Low battery							

► WELDING CONSUMABLES



WELDING WIRE

WELDING WIRE



MIG MAG welding Wire ER70S-6

Diameter: 0.6mm 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm
Roll weight: 1kg 5kg 15kg
Copper-plated steel wire: Proprietary for gas-shielded welding equipment (MIG MAG)
PROPERTIES & ADVANTAGES:
Chemical analysis: C-0.08%|Si-0.9%|Mn-1.5%| P-0.015%|S-0.012%



MIG MAG welding wire E71T-1

Diameter: 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm
Roll weight: 1kg 5kg 15kg
Flux cored wires: Flux cored wires Suitable for MIG MAG welding machines
Standards: AWS A-5.20.E71T-1
PROPERTIES & ADVANTAGES:
Chemical analysis: C-0.18%| Si-0.9%| Mn-1.75%|P-0.03%| S-0.03%



MIG MAG welding wire No Gas E71T-1GS

Diameter: 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm
Roll weight: 1kg 5kg 15kg
No gas wire: Cored wire welding without shielding gas, Suitable for MIG MAG welding machines
Standards: AWS A-5.20.E71T-1GS
PROPERTIES & ADVANTAGES:
Chemical analysis: C-0.19%| Si-0.35%| Mn-0.6%|P-0.011%| S-0.0006%|Al-1.2%



Aluminum welding wire ER4043

Diameter: 0.6mm 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm
Roll weight: 0.5kg 2kg 7kg
Aluminum ER4043.AiSi5
Suitable for MIG MAG welding machines
Standards: ENISO 18273,AiSi5
FEATURES & BENEFITS:
Chemical analysis: Si-4.5-6|FE-0.8|Cu-0.008|Mn-0.05|mg-0.05|Zn-0.1|Ti-0.02|Be-0.0003|Others-0.05



Aluminum welding wire ER5356

Diameter: 0.6mm 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm
Roll weight: 0.5kg 2kg 7kg
Aluminum ER5356, AiSi5
Suitable for MIG MAG welding machines
Standards: ENISO 18273,AiSi5
FEATURES & BENEFITS:
CHEMICALCOMPOSITIONS: Si-0.06|Fe-0.12|Cu-0.08|Mn-0.12|Mg-4.85|Zn-0.00|Ti-0.12|Be-0.0001|Cr-0.09



Stainless steel welding wire ER308L

Diameter: 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm 2.0mm
Roll weight: 1kg 5kg 15kg
Stainless steel welding wire: Suitable for MIG MAG welding machines
Standards: AWS A5.9 ER308L
CHEMICALCOMPOSITIONS: C-0.023%|Mn-1.53%|Si-0.40%|Cr-20.12%|Ni-10.35%|Mo-0.37%|p-0.013%|S-0.009%



Stainless steel welding wire ER309L

Diameter: 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm 2.0mm
Roll weight: 1kg 5kg 15kg
Stainless steel welding wire: Suitable for MIG MAG welding machines
Standards: AWS A5.9 ER309L
CHEMICALCOMPOSITIONS: C-0.021%|Mn-1.95%|Si-0.34%|Cr-23.09%|Ni-12.92%|Mo-0.39%|p-0.012%|S-0.008%



Stainless steel welding wire ER316L

Diameter: 0.8mm 0.9mm 1.0mm 1.2mm 1.6mm 2.0mm
Roll weight: 1kg 5kg 15kg
Stainless steel welding wire: Suitable for MIG MAG welding machines
Standards: AWS A5.9 ER316L
CHEMICALCOMPOSITIONS: C-0.023%|Mn-1.90%|Si-0.42%|Cr-19.12%|Ni-12.59%|Mo-2.59%|p-0.009%|S-0.008%

WELDING WIRE

► WELDING CONSUMABLES



TIG WELDING RODS

TIG WELDING RODS

ER70S-6 TIG

ER70S-6 TIG Welding Rods are an unalloyed welding rod for TIG welding of general structural steels and pipe steels.ER70S-6 TIG Welding Rods must be welded using pure Argon (Ar) shielding gas. Thin and homogeneous copper coating increase resistance to rusting.

4043 ALUMINIUM TIG

4043 Aluminium TIG Welding Rods are a high-quality TIG wire for the purpose of TIG welding cast aluminium and specifically the 4000 to 6000 series. The major element in 4043 wire is 5% silicon.4043 is a softer wire due to its silicon content which makes it ideal for welding castings as the melting point is lowered. The filler wire is supplied in 5kg Tubes.

5356 ALUMINIUM TIG

5356 Aluminium TIG Welding Rods are a triple shaved TIG wire for the purpose of welding cats and wrought aluminium and specifically the 3000,5000 & 6000 series. 5356 is sometimes referred to as“marine grade” because it is widely used in the marine industry and it is very commonly found in general fabrication applications as well. The major element in 5356 wire is 5% magnesium. The wire has excellent weldability and corrosion resistance. The wire is packaged in 1kg & 5kg tubes.

308L STALNLESS TIG

308L Stainless TIG welding rods are a high-quality low carbon TIG wire used for TIG welding 300 series stainless steels. It is also specifically used in welding 304 and 304L stainless steel in critical applications. This particular rod can also be used for gas (oxy/acetylene)welding and is available in 5kg tubes.

316L STAINLESS TIG

316L Stainless TIG Welding Rods are a high-quality low carbon TIG wire used for TIG welding 316 and 316L stainless steel alloys.316L is also suitable for welding other 300 grade stainless steels such as 302 and 304 grades. This particular rod can also be used for gas (oxy/acetylene) welding and is available in 1kg & 5kg tubes.

ELECTRODE

MODEL NAME	STANDARD	CHEMICAL COMPOSITION	DESCRIPTION
E6013	AWS A5.1 E6013 GB/T 5117 E4313	C-0.079% Mn-0.38% Si-0.21% S-0.018% P-0.024% Ni-0.020% Cr-0.032% Cr-0.032% V-0.010%	It is a kind of carbon steel electrode with titania type coating.AC/DC.All-position welding.It has excellent welding performance,excellent operating performance,easy reignition,stable arc and beautiful appearance of weld.
E7018	AWS A5.1 E7018 GB/T 5117 E5018	C-0.087% Mn-1.10% Si-0.56% S-0.012% P-0.021% Ni-0.011% Cr-0.028% Mo-0.007% V-0.016%	It is a kind of carbon steel electrode with iron powder low-hydrogen natrium type coating.DCRP (Direct Current Reversed Polarity).All-position welding. The deposition efficiency is higher due to the iron powder in the coating.
E308L-16	AWS A5.4 E308L-16 GB/T E308L-16	C-0.024% Mn-1.30% Si-0.62% S-0.008% p-0.020% Ni-9.80% Cr-19.90% Mo-0.40% Cu-0.035%	It is a kind of ultra-low-carbon Cr19Ni10 stainless steel electrode with lime-titania type coating.The carbon content of the deposited metal is lower than or equal to 0.04%.It has excellent intercrystalline corrosion-resistance and welding performance.
E309L-16	AWS A5.4 E309L-16 GB/T E309L-16	C-0.024% Mn-1.32% Si-0.65% S-0.007% p-0.021% Ni-12.9% Cr-23.30% Mo-0.045% Cu-0.035%	It is a kind of ultra-low-carbon Cr23Ni13 stainless steel electrode with lime-titania type coating.AC/DC.Due to the low carbon content,it can still resist intercrystalline corrosion led to by carbide precipitation without any stabilizers like Nb,Ti,etc.
E316L-16	AWS A5.4 E316L-16 GB/T E316L-16	C-0.025% Mn-1.20% Si-0.60% S-0.007% p-0.021% Ni-11.60% Cr-19.05% Mo-2.45% Cu-0.038%	It is a kind of ultra-low-carbon Cr18Ni12Mo2 stainless steel electrode with lime-titania type coating.The carbon content of the deposited metal is lower than or equal to 0.04%.It has excellent heat-resistance,corrosion-resistance,crack-resistance,blowhole-resistance and welding performance.The coating has red-resistance and high strength.AC/DC.

ELECTRODE

► WELDING CONSUMABLES



TUNGSTEN ELECTRODE

TUNGSTEN ELECTRODE



THORIATED TUNGSTEN ELECTRODE

USES

- Primarily for DC welding of Carbon & Stainless steels,nickle alloys and titanium etc.
- Performance well when over loaded with extra amperage the most commonly used tungsten in welding.

Model	Intermingled materials	Intermingled Quantity%	Color standard
WT10	THO ₂	0.90-1.20	Yellow
WT20	THO ₂	1.80-2.20	Red
WT30	THO ₂	2.80-3.20	Purple
WT40	THO ₂	3.80-4.20	Orange



CERIATED TUNGSTEN ELECTRODE

USES

- A non-radioactive material.Know to be expecially good for DC welding with low amperage.
- Suitable for the welding of orbital tube, pipe, very small parts, short welding cycles.

Model	Intermingled materials	Intermingled Quantity%	Other Intermingled Quantity%	Tungsten	Color standard
WC20	CeO ₂	1.80-2.20	<0.20	Remainder	Grey

PURE TUNGSTEN ELECTRODE

USES

- Suitable for welding under AC mainly using when welding aluminum and aluminum-alloy.

Electrode name	Model	Intermingled materials	Intermingled Quantity%	Other Intermingled	Tungsten	Color standard
Pure Tungsten Electrode	WP	—	—	<0.20	Remainder	Green



LANTHANATED TUNGSTEN ELECTRODES

USES

- Popular in the circle of welding world.
- The electric conductivity of Lanthanated Tungsten is the most closed to than of 2%.
- Thoriated Tungsten.Can easily replace Thoriated Tungsten Electrode with.
- Lanthanated Tungsten at either DC or AC and not have to make any welding program changes.

Model	Intermingled materials	Intermingled Quantity%	Other Intermingled Quantity%	Tungsten	Color standard
WL10	La ₂ O ₃	0.80-1.20	<0.20	Remainder	Black
WL15	La ₂ O ₃	1.30-1.70	<0.20	Remainder	Golden
WL20	La ₂ O ₃	1.80-2.20	<0.20	Remainder	Sky blue




ZIRCONIATED TUNGSTEN ELECTRODEE

USES

- Can not be replaced by any other electrodes in terms of its excellent performance.
- Retains a ball end when welding,which results in less tungsten permeation and good corrosion resistance.

Model	Intermingled materials	Intermingled Quantity%	Other Intermingled Quantity%	Tungsten	Color standard
WZ3	ZrO ₂	0.20-0.40	<0.20	Remainder	Brown
WZ8	ZrO ₂	0.70-0.90	<0.20	Remainder	White

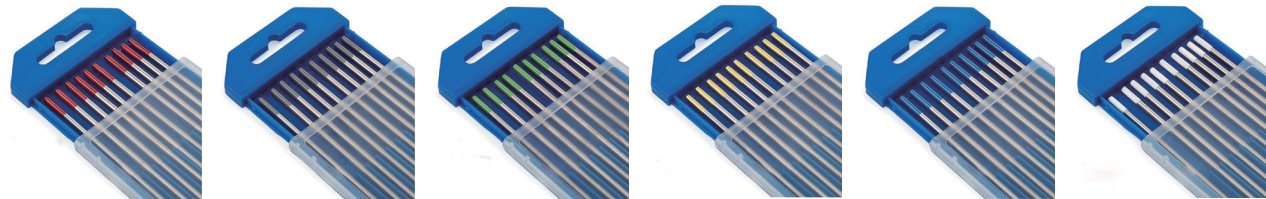


TUNGSTEN ELECTRODE

MIG Wire Size and packing


Size(mm) Packing	0.5kg or 1kg/ D100mm Plastic Spool	2kg or 5kg/ D200mm Plastic Spool	15kg/D270mm Plastic Spool	15kg/D300mm Plastic Spool	15kg/K300mm or SV300mm Metal Basket	Pail pack			
						100kgs	200kgs	250kgs	350kgs
Φ0.6/Φ0.8/ Φ0.9/Φ1.0/ Φ1.2/Φ1.6	★	★	★	★	★	★	★	★	★

SV300 Metal Basket

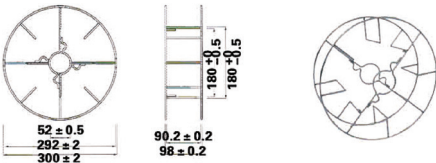


METAL BASKET WITH ADAPTER
Made of Φ3.9mm coppered metal wire.Kg.15 wire capacity.
Suitable for both high precision and random lowing.

K300 Metal Basket

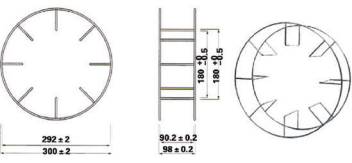


METAL BASKET
Made of Φ3.9mm coppered metal wire.Kg.15 wire capacity.
Suitable for both high precision and random lowing.

D300mm Plastic Spool

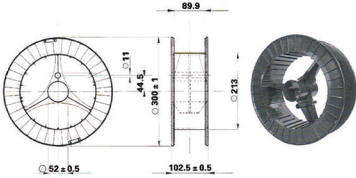


REEL FOR HIGH PRECISION LOWING D300
Made of ABS, according to DIN 8559/ISO864:1988(E) specification.Kg.15 wire capacity. Internal dimension 89.9 mm.

D270mm Plastic Spool

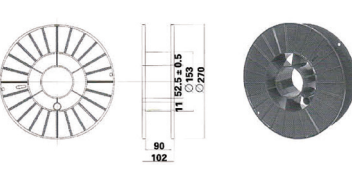


SMALL REELFOR HIGH PRECISION LOWING D270
Made of ABS, according to DIN 8559/ISO 864:1988(E) specification.Kg.15 wire capacity.

D200mm Plastic Spool

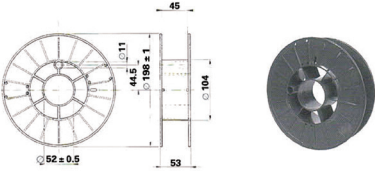

SMALL REEL D200
Made of ABS/polypropylene, according to DIN 8559/ISO 864:1988 (E) specification. 5 Kg wire capacity.

D100mm Plastic Spool

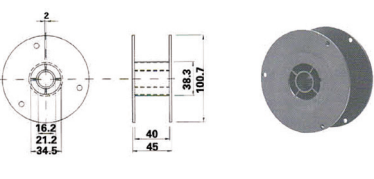

SMALL REEL D100
Made of ABS intentionally for winding wire. Capacity:1Kg. wire.


TIG Wire Size and Packing

Size(mm) Packing	Plastic Tube	
Φ1.2/Φ1.6/ Φ2.0/Φ2.5/ Φ3.2/Φ4.0	5kgs	10kgs
	★	★

Submerged Arc Welding Wire

Size(mm)	Weight per Roll (kg)
Φ2.0/Φ2.5/ Φ3.2/Φ4.0/ Φ4.8	25/100/200/ 250/350


Metal Basket Core

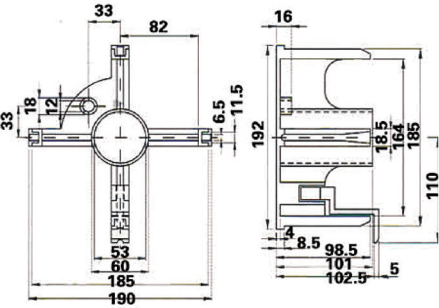

METAL BASKET ADAPTER
Made of AB3 and Hostaform.



Instructions & Accessories





**PLASTIC DOME
FOR 250 KG DRUM**
Diameter 510 mm



FLEXIBLE HOSE
connecting the dome to the welding unit internal diameter:3.5 and 5.5 mm-length:3.5 and 5.5m -On request. It is also available in the following size:1/1.5/2/2.5/3 meters.



**FILLET FOR
CONNECTION HOSE**

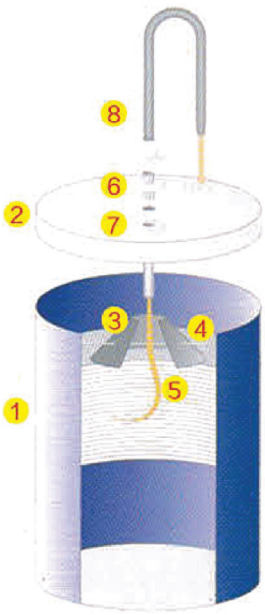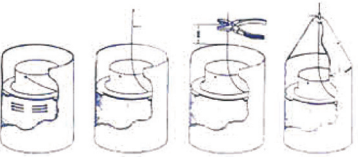

Description

1.Drum 2.Cover 3.Internal priced cone 4.Stick 5. Wire 6.Nut 7.Lock nut 8.Liner

Directions for use

- Let the wire cross the cone from the internal after removing the stick lock cone;
- Unwind the wire for some meters, pierce the middle of the cover, put the nut on the little hole from the outside and the lock nut from the inside;
- Fix the liner on the nut and fush the wire in the nut/liner before closing the cover.

Eco-pack

- Ecologic because it is completely recyclable;
- Easy handing packing (each drum on a mini pallet);
- Innovative winding of wire;
- No wire crossing.

Advantages

- No need for plastic cones;
- Wire without torsion and helix ;
- Regular slide in the nozzle (increase life of the nozzle);
- Storage optimization.

Accessories

- Conduit of min 5.5 meters;
- Connection kit.

Warning

